



SLO 3225

32" Wide Open Frame LCD Display, 1000nits, WXGA

SLO 3225 wide open frame LCD display, built-in 1000 nits high brightness for sunlight readable application. Features wide operating temperature, high brightness, AOT optical bonding, touch screen capable, and customized mechanical design; fulfill the demand for extreme environments. It offers the best visibility, performance and cost effective value. The high level of brightness together with fast response time and backlight technology, the monitor brings remarkable display quality. And guaranteeing product life cycle longevity, stability, and reliability. Perfectly suitable for kiosk, ATM, POS, marine, military, medical, transportation, and outdoor industrial application.

Key Features

- Sunlight Readable
- Wide Viewing Angle
- High Contrast Ratio
- Long Lamp Life
- Fast Response Time
- Thin and Light

Applications

Marline, Military,
Medical, Transportation
Industrial



Specifications

V1

Model No.	SLO3225
Description	32" Wide Open Frame LCD Display, 1000 nits, WXGA
Display Area (mm)	697.68 x 392.26mm
Brightness	1000 cd/m ²
Resolution	1366x768 (WXGA)
Contrast Ratio	3000 : 1
Pixel Pitch (mm)	0.51075(H) x 0.51075 (V)
Viewing Angle	+89°~ -89°(H), +89°~ -89°(V)
Display Colors	16.7M
Response Time (Typical)	6.5ms
Power Input	DC-12V
Power Consumption	160W
Dimensions (mm)	771.6x426.4x91
Weight (Net)	26.5Kg
Control Board (Optional)	<input type="checkbox"/> AD5621GA <input type="checkbox"/> AD5621GD <input type="checkbox"/> AD5766GDVA <input type="checkbox"/> AD2662GDVAR
<input type="checkbox"/> AD5621GA	VGA+Audio
<input type="checkbox"/> AD5621GD	VGA+DVI
<input type="checkbox"/> AD5766GDVA	VGA+CVBS+S-Video+Audio (Optional DVI / Component)
<input type="checkbox"/> AD2662GDVAR	VGA+DVI (Optional S-Video/ Component / Audio)
F / R Control Button	<input type="checkbox"/> 5 Key <input type="checkbox"/> 4 Key
<input type="checkbox"/> 5 Key	Power Switch, Menu, Select (+, -), Auto
<input type="checkbox"/> 4 Key	Power Switch, Menu, Select (+, -),
OSD Menu	Brightness, Contrast, H/V Position, Color, Phase, Clock...
Optional	<input type="checkbox"/> AOT <input type="checkbox"/> Touch Screen <input type="checkbox"/> Waterproof

Specifications are subject to change without notice.


All brands or product names are trademarks or registered trademarks of their respective companies.



Mechanical Drawing

Outline Dimensions

Unit:mm

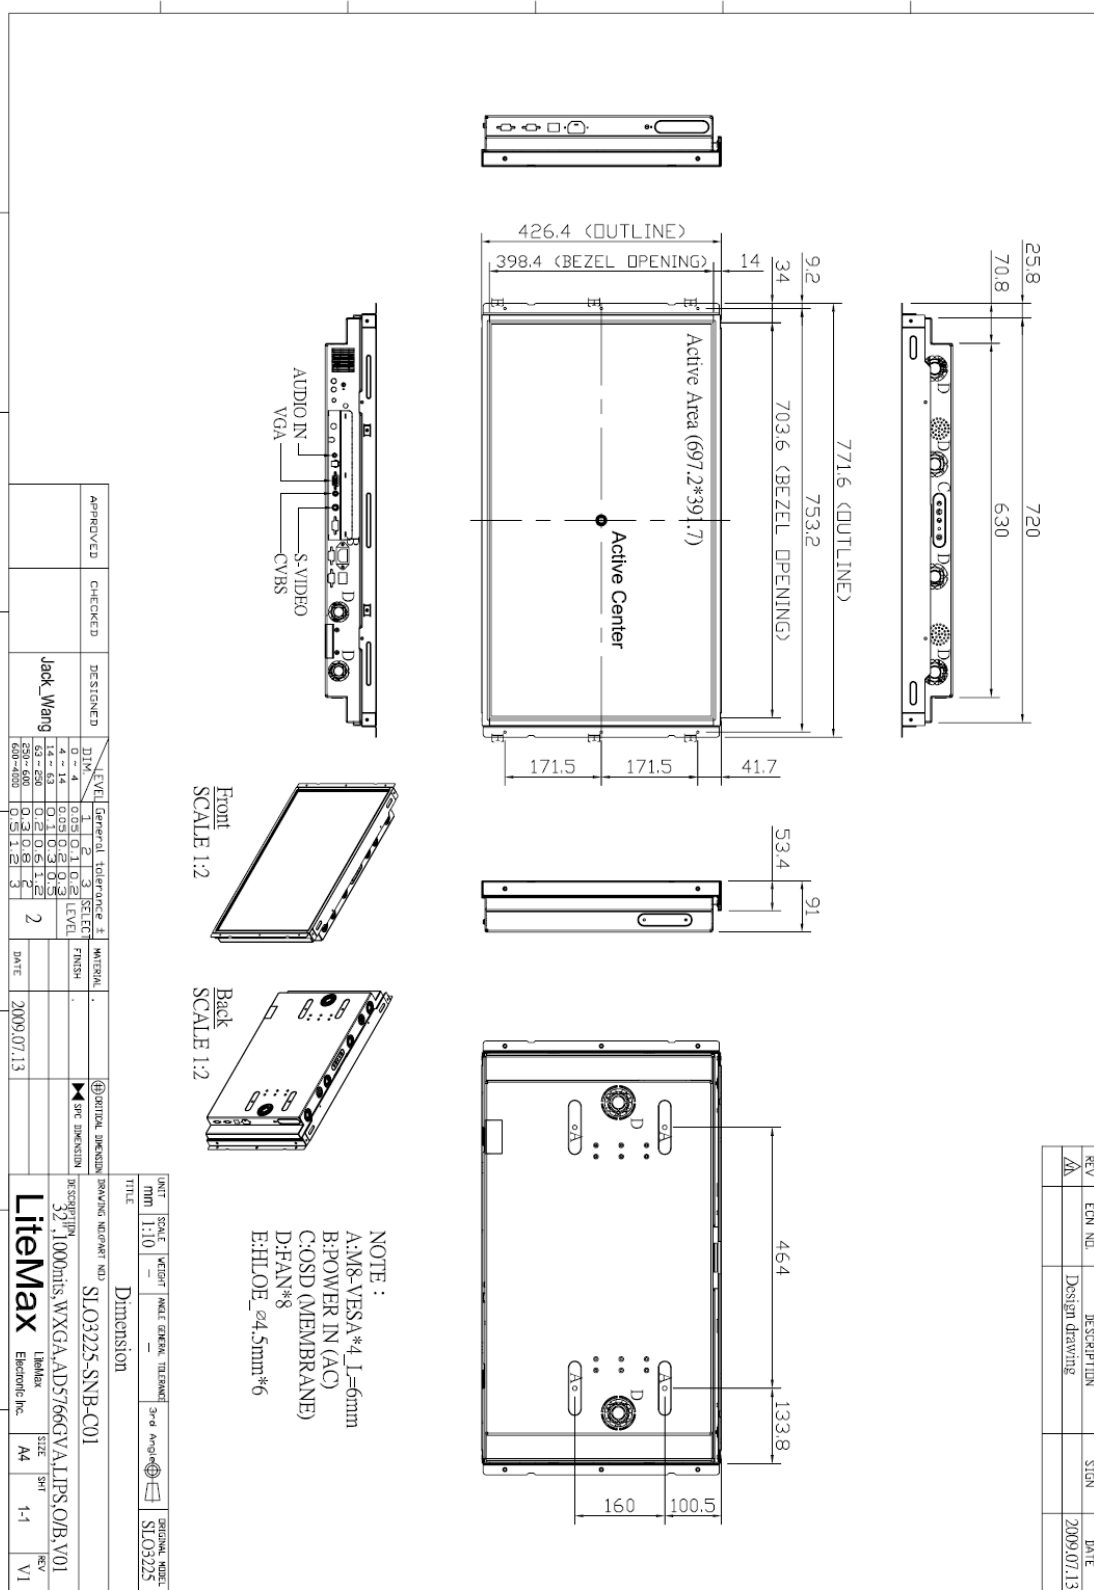



Ordering Information

Part Number	Description
SLO3225-SNB-C01	32",1000nits,WXGA,AD5766VA.LIPS,O/B,V01

Optional Accessories

Part Number	Description
810618301010	CABLE.POWER.AC.1830mm USA type
810618301090	CABLE,POWER,AC,1830mm Europe type
810618301050	CABLE.POWER.AC.1830mm UK type
810618301170	CABLE.POWER,AC,1830mm Australia type
810618301030	CABLE.POWER.AC.1830mm Japan type