



LITEMAX

DLD1900-D
19" LED B/L LCD

User Manual

Approved by	Checked by	Prepared by

LITEMAX Electronics Inc.
8F, No.137, Lane 235, Bau-chiau Rd.,
Shin-dian Dist., New Taipei City, Taiwan
R.O.C.
Tel : 886-2-8919-1858
Fax: 886-2-8919-1300
Homepage: <http://www.litemax.com>

Record of Revision

Version and Date	Page	Old Description	New Description	Remark
Aug/31/2026	all		Initial release	

Contents

Record of Revision	2
Contents	3
1 General Description.....	4
1.1 Key Features.....	4
1.2 General Specifications.....	4
1.3 Absolute Maximum Ratings.....	5
2 Electrical Specifications	6
2.1 Electrical Characteristics.....	6
2.2 Recommended Power On/Off Sequence.....	7
2.3 Timing Characteristics	8
2.4 Input/ Output Terminals	11
3 Optical Specification	12
4 LED Driving Board Electrical Characteristics.....	14
4.1 LED Driving Board Operating Characteristics	14
4.2 LED Driving Board Connector Pin Assignment	15
4.3 LED Driving Board Mechanical Characteristics.....	16
5 Mechanical Drawing	17
6 AD9701HP Board & OSD Functions	20
6.1 OSD Function.....	26
6.2 OSD Menu	27
7 Precautions	33
7.1 Handling and Mounting Precautions.....	33
7.2 Storage Precautions	33
7.3 Operation Precautions	34
8 Disclaimer.....	34

1 General Description

The **DLD1900-D** is a 19 inch industrial grade LCD, with brightness **2000 nits**, it produces sharp images, crisp text and lifelike colors. The Durapixel LED backlight technology ensures high reliability and low power consumption, suitable for indoor application, kiosk, factory automation, military, transportation and gaming application.

1.1 Key Features

- Brightness 2000nits
- Sunlight readable
- Resolutions: 1920 x 1536
- Wide Viewing Angle of 178°(H), 178°(V)
- LED Backlight
- Wide temperature (-20°C ~ 70°C)
- Low power consumption
- BL MTBF: 100,000 hours

1.2 General Specifications

Model Name	DLD1900-D
Description	19" TFT LCD, LED Backlight 2000 nits, 1920x1536
Screen Size	19"
Display Area (mm)	376.3584(H) x 301.0867(V)
Brightness	2000 cd/m2
Resolution	1920x1536
Aspect Ratio	5:4
Contrast Ratio	1200:1
Pixel Pitch (mm)	0.19602(H) x 0.19602(V)
Pixel Per Inch (PPI)	129
Viewing Angle	178°(H),178°(V)
Color Saturation (NTSC)	83%
Display Colors	16.7M
Response Time (Typical)	25ms
Panel Interface	LVDS
Input Interface	HDMI,DP
Input Power	DC12V
Power Consumption	37W
OSD Key	4 Keys (Power Switch, Menu, +, -)
OSD Control	Brightness, Color, Contrast, Auto Tuning, H/V Position...etc
Dimensions (mm)	396.0(W) x 326.01(H) x 36(D)
Bezel Size(U/B/L/R)	12.46/12.46/9.82/9.82mm
Mounting	75x75,100x100mm
Weight (Net)	2.5kg
Operating Temperature	-20°C ~ 70°C
Storage Temperature	-30°C ~ 80°C

DLD= Panel + LED Driving Board + AD Control Board + Chassis

1.3 Absolute Maximum Ratings

Absolute Electrical Ratings

Item	Symbol	MIN	MAX	Unit	Remark
Power Voltage	VCC	0.3	5.5	V	Note1
BL_POWER Input	LED_VCCS	-0.3	13.2	V	
BL_PWM signal input	LED_PWM	-0.3	6	V	
BL ENABLE	LED_EN	-0.3	6	V	
Operating Temperature	Top	-20	70	°C	
Storage Temperature	Tst	-30	80	°C	
Relative Humidity Note2	RH	--	≤95	%	Ta≤40°C
		--	≤85	%	40°C < Ta≤50°C
		--	≤55	%	50°C < Ta≤60°C
		--	≤36	%	60°C < Ta≤70°C
		--	≤24	%	70°C < Ta≤80°C
Absolute Humidity	AH	--	≤70	g/m³	Ta>70°C

Table. Absolute Maximum Ratings

Note1: Input voltage include all in put data.

Note2: Ta means the ambient temperature. It is necessary to limit the relative humidity to the specified temperature range. Condensation on the module is not allowed.

Note3: The absolute maximum rating values of this product are not allowed to be exceeded at any times. A module should be used with any of the absolute maximum ratings exceeded, the characteristics of the module may not be recovered, or in an extreme condition, the module may be permanently destroyed

2 Electrical Specifications

2.1 Electrical Characteristics

DC Characteristics for Panel Driving

Item		Symbol	MIN	TYP	MAX	Unit	Remark
Supply Voltage		VCC	4.5	5	5.5	V	Include ripple
VDD Current	60Hz	IVCC	--	(341)	--	mA	White pattern
Power Consumption	60Hz	PVCC	--	(1705)	--	mW	
Inrush current		Irush	--	--	1.5	A	Note2
Differential input high threshold voltage		R_{xVTH}	+100	--	--	mV	$R_{xVCM}=1.2V$
Differential input low threshold voltage		R_{xVTL}	--	--	-100	mV	
Input voltage range(single-end)		R_{xVIN}	0	--	2.4	V	
Differential input common mode voltage		R_{xVCM}	1.0	1.2	$2.4 - V_{ID} /2$	V	
Differential input voltage		$ V_{ID} $	100	--	600	mV	

Table. Operating Voltages


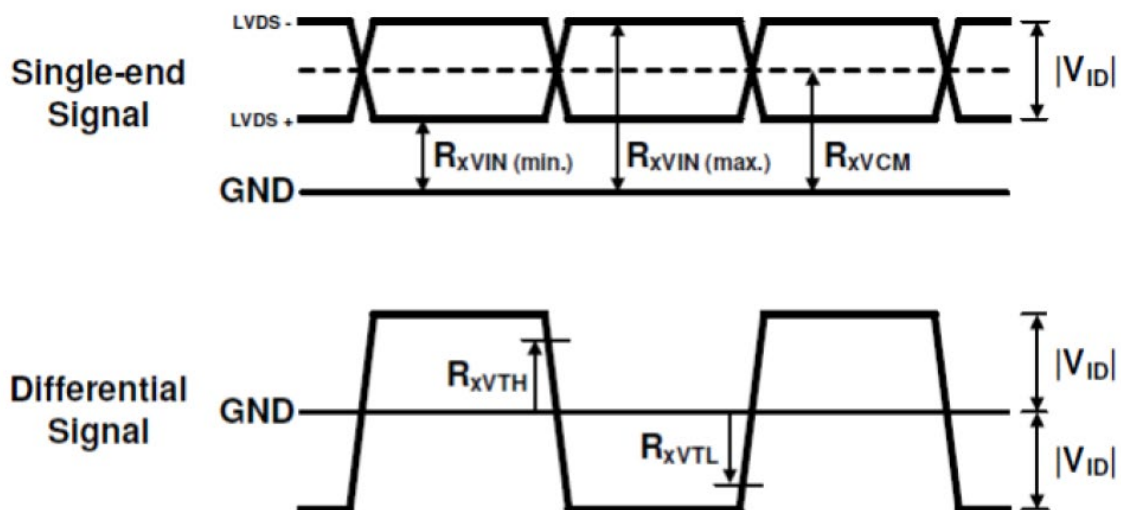


Figure. LVDS DC Characteristics

Note1: Indicated the subsequent version may be updated.

Note2: To test the current dissipation, using the “white pattern” shown

VCC rising time is 470 μ s

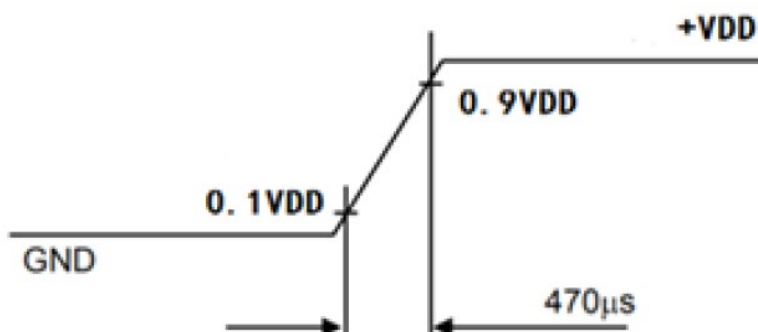

2.2 Recommended Power On/Off Sequence

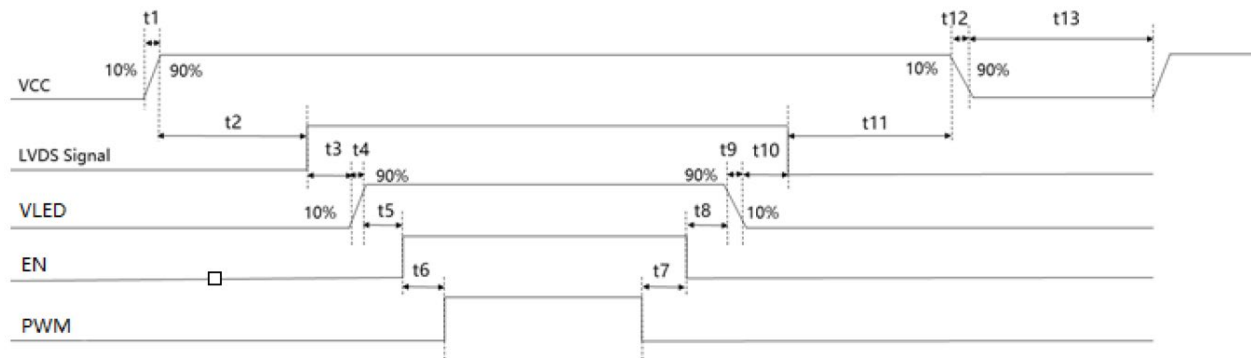


Figure. Power ON/OFF Sequence

Symbol	Min	Typ	Max	Unit	Remark
t1	0.5	-	10	ms	
t2	100	-	-	ms	
t3	200	-	-	ms	
t4	1	-	-	ms	Note 1
t5	2	-	-	ms	
t6	2	-	-	ms	
t7	2	-	-	ms	
t8	2	-	-	ms	
t9	1	-	-	ms	
t10	200	-	-	ms	
t11	200	-	-	ms	
t12	-	-	200	ms	
t13	1000	-	-	ms	

Note1: The low level of these signals and analog powers are GND level.

Note2: All of the power and signals should be kept at GND level before power on. If there are residual voltages on them, the LCD might not work properly.

Note3: The power on/off sequence is the first version. It will be updated when the design is fixed.

Note4: Keep Enable low level until the display has stabilized.

Note5: Indicated the subsequent version may be updated

2.3 Timing Characteristics

AC Electrical Characteristics

Parameter	Symbol	Condition	Min.	Typ.	Max.	Unit
Clock frequency	R_{xCLK}		-	104.3	-	MHz
Input data Position0	t_{RIP1}		$- t_{RMG} $	0.0	$ t_{RMG} $	ns
Input data Position1	t_{RIP0}		$T/7 - t_{RMG} $	$T/7$	$T/7 + t_{RMG} $	ns
Input data Position2	t_{RIP6}		$2T/7 - t_{RMG} $	$2T/7$	$2T/7 + t_{RMG} $	ns
Input data Position3	t_{RIP5}		$3T/7 - t_{RMG} $	$3T/7$	$3T/7 + t_{RMG} $	ns
Input data Position4	t_{RIP4}		$4T/7 - t_{RMG} $	$4T/7$	$4T/7 + t_{RMG} $	ns
Input data Position5	t_{RIP3}		$5T/7 - t_{RMG} $	$5T/7$	$5T/7 + t_{RMG} $	ns
Input data Position6	t_{RIP2}		$6T/7 - t_{RMG} $	$6T/7$	$6T/7 + t_{RMG} $	ns
Input data skew margin	T_{RSKM}	$R_{xCLK} = 85\text{MHz}$ $R_{xVTH} - R_{xVTL} = 200\text{ mV}$	-400	-	+400	ps
Input spread spectrum ratio	SS_R		-	-	+/-3	%
Input modulation frequency	F_M		-	-	300k	Hz
Jitter tolerance	T_{jitter_tol}				200	ps

Table. LVDS AC Characteristics

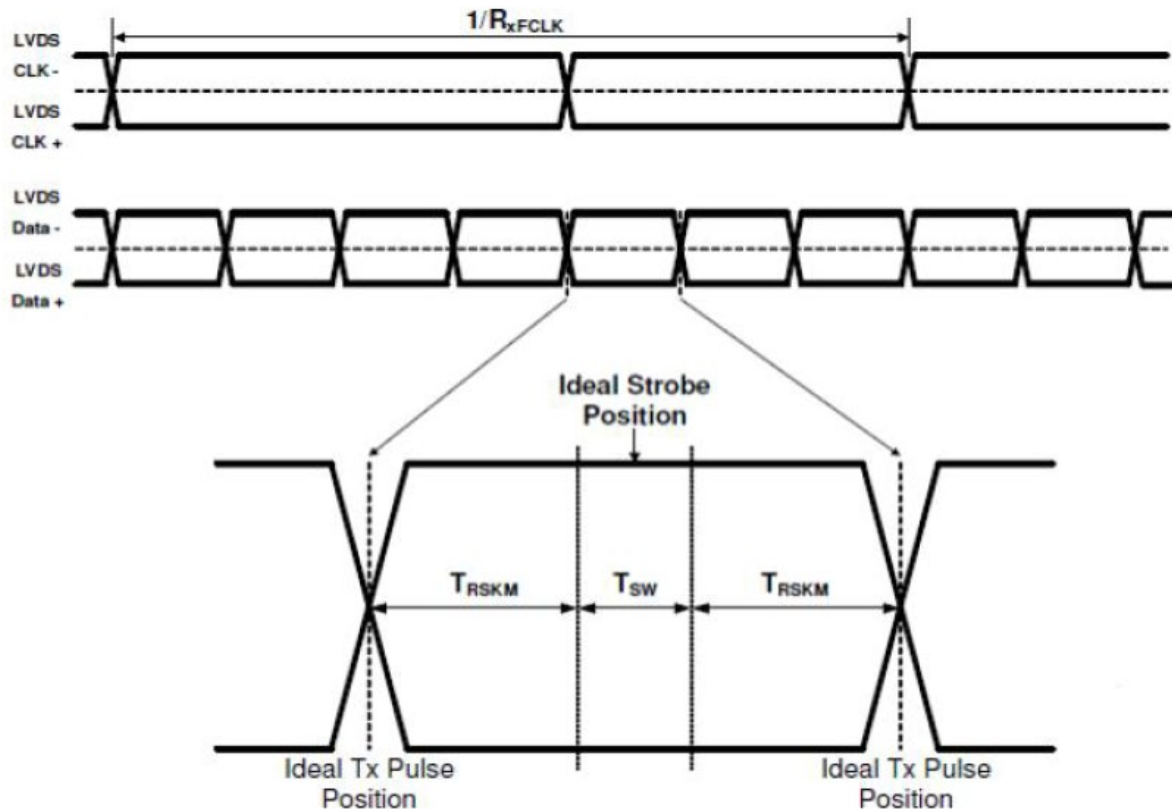


Figure. LVDS DC Characteristics

Note1: T_{SW} : Strobe width (LVDS IP internal data sampling window)

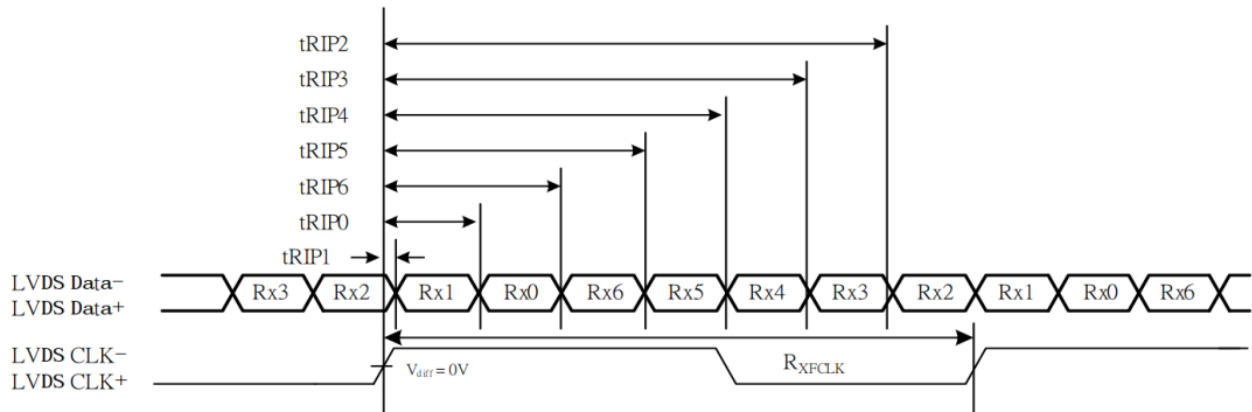


Figure. LVDS AC Characteristics

LVDS signal timing characteristics

Parameter		Symbol	Min.	Typ.	Max.	Unit	Remark
DCLK frequency		Fclk	101.62	104.30	109.03	MHz	Tclk=1/Fclk
Horizontal section	Horizontal total	Th	1085	1110	1135	Tclk	
	Horizontal blanking	Thb	125	150	175	Tclk	
	Valid Data Width	Thd	960			Tclk	
Vertical section	Vertical total	Tv	1561	1566	1601	TH	
	Vertical blanking	Tvb	25	30	65	TH	
	Valid Data Width	Tvd	1536			TH	
Frame Rate		FR	60			Hz	

Table. Input Timing Parameters

Note1: Timing is unverified, for reference only. Update after verification.

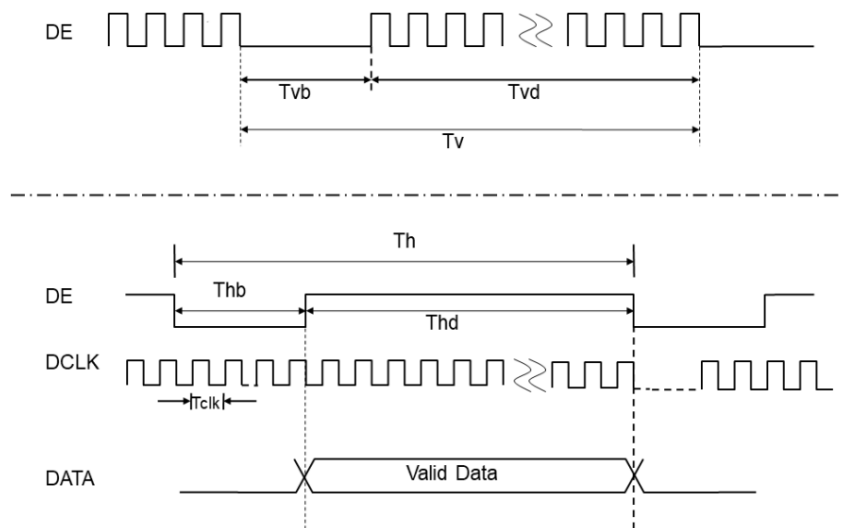


Figure. Clock and Data Input Timing Diagram

LVDS data mapping

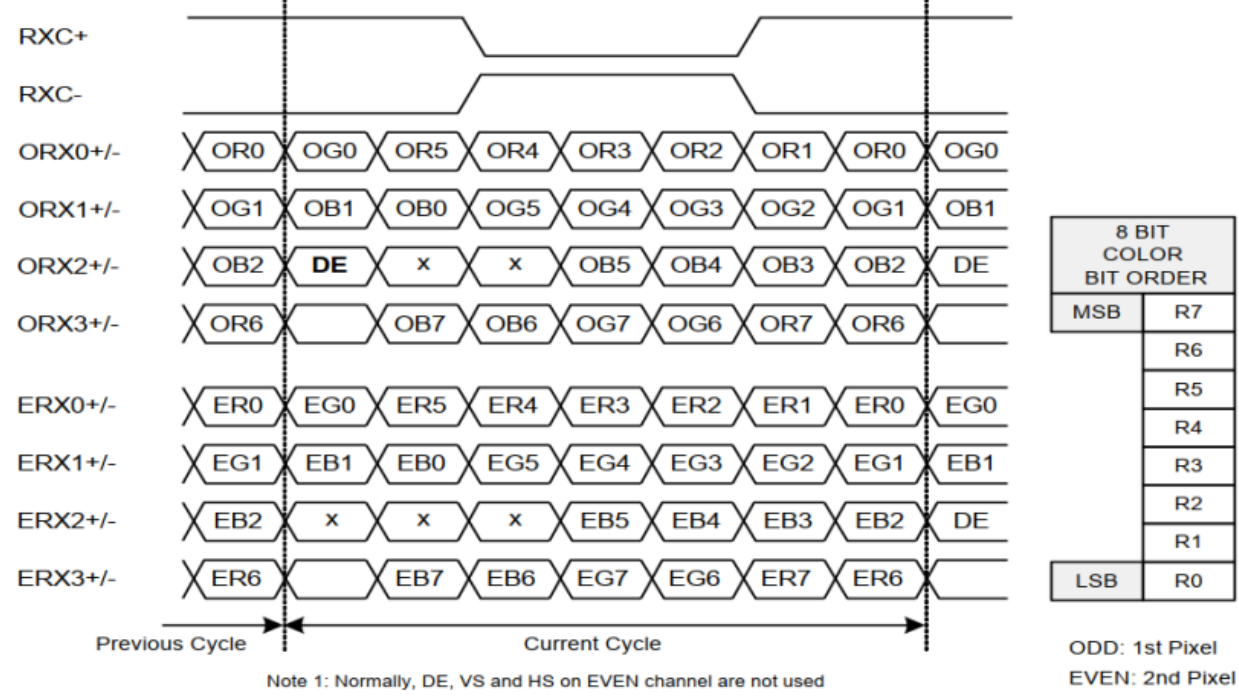


Figure. LVDS data mapping (VESA standard)

2.4 Input/ Output Terminals

CN1 Pin assignment (LCD Interface)

Connector Information	
LCD Module connector	DF14H-30P-1.25H(52)
Matching connector	DF14-30S-1.25C(10)

Table. Connector Information

No	Symbol	I/O	Description	Comment
1	ORX0-	I	- LVDS differential data input	
2	ORX0+	I	+ LVDS differential data input	
3	ORX1-	I	- LVDS differential data input	
4	ORX1+	I	+ LVDS differential data input	
5	ORX2-	I	- LVDS differential data input	
6	ORX2+	I	+ LVDS differential data input	
7	GND	P	Ground	
8	ORXC-	I	- LVDS differential clock input	
9	ORXC+	I	+ LVDS differential clock input	
10	ORX3-	I	- LVDS differential data input	
11	ORX3+	I	+ LVDS differential data input	
12	ERX0-	I	- LVDS differential data input	
13	ERX0+	I	+ LVDS differential data input	
14	GND	P	Ground	
15	ERX1-	I	- LVDS differential data input	
16	ERX1+	I	+ LVDS differential data input	
17	GND	P	Ground	
18	ERX2-	I	- LVDS differential data input	
19	ERX2+	I	+ LVDS differential data input	
20	ERXC-	I	- LVDS differential clock input	
21	ERXC+	I	+ LVDS differential clock input	
22	ERX3-	I	- LVDS differential data input	
23	ERX3+	I	+ LVDS differential data input	
24	GND	P	Ground	
25	GND	P	Ground	
26	GND	P	Ground	
27	GND	P	Ground	
28	VCC	P	Power supply(5V)	
29	VCC	P	Power supply(5V)	
30	VCC	P	Power supply(5V)	

Table. Pin Assignment for LCD Interface

Note1: I/O definition: I---Input, O---Output, P---Power/Ground, N---No connection


Note2: All of the GND pins should be connected to the system ground.

3 Optical Specification


Item		Symbol	Condition	Min.	Typ.	Max.	Unit	Note
Color chromaticity	Red	R _x	$\theta_x=0$ $\theta_y=0$ CA-410	0.620	0.650	0.680	-	Test Mode: (2) (3)
		R _y		0.314	0.344	0.374	-	
	Green	G _x		0.295	0.325	0.355	-	
		G _y		0.604	0.634	0.664	-	
	Blue	B _x		0.124	0.154	0.184	-	
		B _y		0.033	0.063	0.093	-	
	White	W _x		0.295	0.325	0.355	-	
		W _y		0.330	0.360	0.390	-	
Center Luminance of White		L _c	$\theta_x=0$	1800	2000	2600	cd/m ²	
Uniform		L _u	$\theta_y=0$ CA-410		86		%	
Contrast Ratio		CR	$\theta_x=0$	1080:1	1200:1		-	Test Mode: (4)
Color Saturation		NTSC	$\theta_y=0$ Klein K-10		83		%	
Viewing Angle	Horizontal	θ_{x+}	$CR \geq 10$		89		Deg	Test Mode: (1)
		θ_{x-}			89			
	Vertical	θ_{y+}			89			
		θ_{y-}			89			

Test Mode :


(1) Definition of Viewing Angle (θ_x , θ_y):

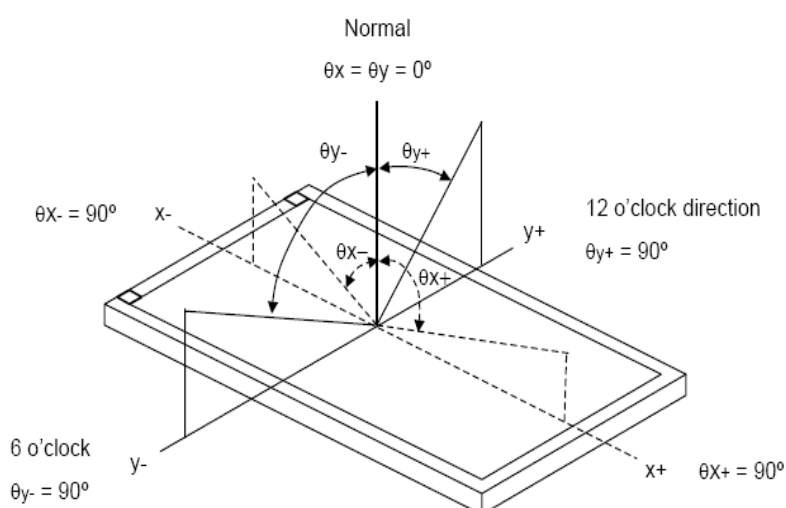


(2) Definition of Test Point:

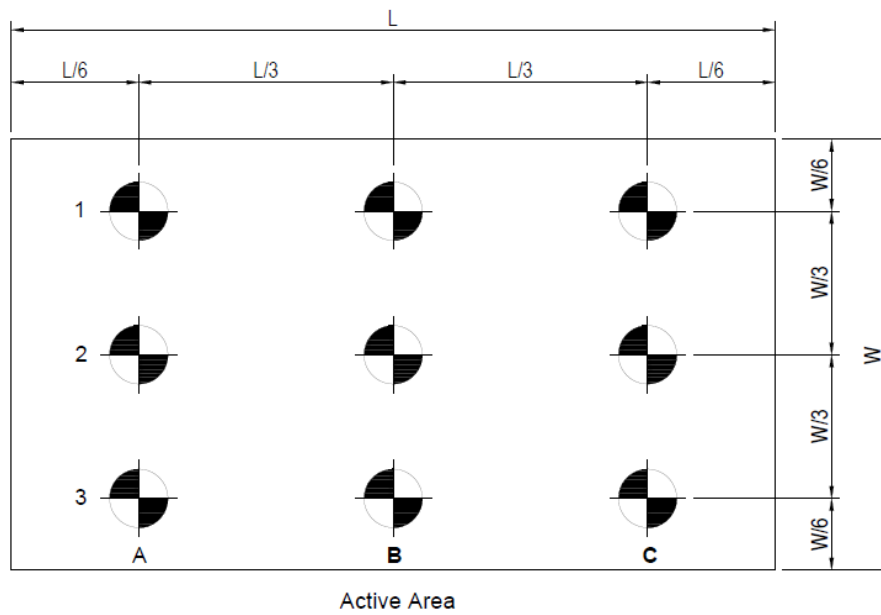

(3) CA-410 Measurement Setup:

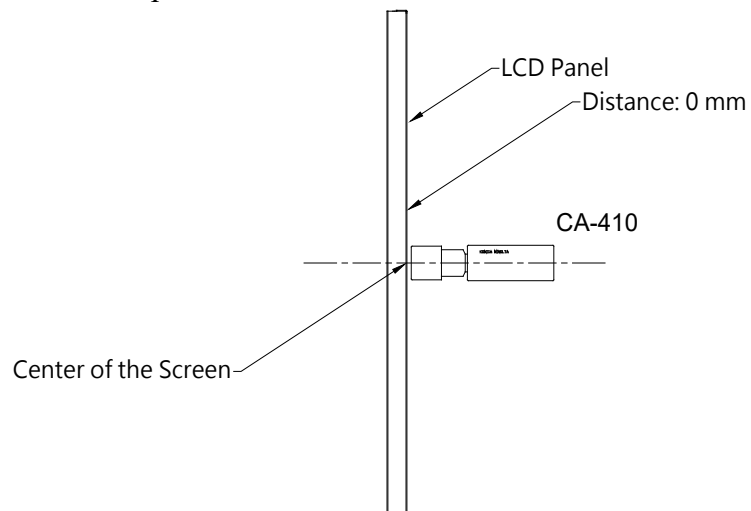

(4) Klein K-10 Measurement Setup:

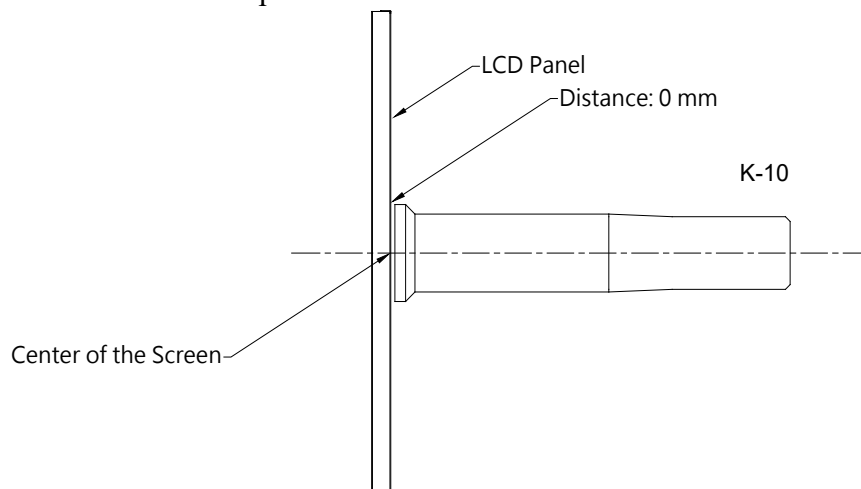

4 LED Driving Board Electrical Characteristics

4.1 LED Driving Board Operating Characteristics

Item	Symbol	Condition	MIN.	TYP.	MAX.	Unit	Remark
Input Voltage	V _{in}		10.0	12.0	14.0	V	
Input Current (High Brightness)	I _{inH}	Brightness = 100%	3.69	3.06	2.63	A	(1)
Input Power Consumption	P _{in}	Brightness = 100%	-----	36.9	-----	W	
LED Current (High Brightness)	I _{outH}	Brightness = 100%	-----	1	-----	A	
Working Frequency	W_Freq	Brightness = 100%	-----	400	-----	KHZ	
Brightness Control	DC mode						
	V _{adj}	Connection of Voltage	0.2	-----	4.8	V	(2)
	PWM mode						
	PWM	Connect to PWM	0	-----	100	%	(3)
	Freq		-----	200	-----	Hz	(4)
ON/OFF Control	V _{on}	Normal Operation	2	-----	5	V	
	V _{off}		0	-----	0.8	V	
Output Voltage	V _{out}	Brightness = 100%	-----	33.78	-----	V	
Efficiency	η	Brightness = 100%	-----	92	-----	%	(5)

Remark:

- (1) This data is based on the testing result of practical input voltage, I_{in} is measured by related V_{in}. (min, typ, max) .If the voltage is increased, the current will decrease. If the voltage is decrease, the current will increase
- (2) Max brightness at V_{adj}=0.2V. Min brightness at V_{adj}=4.8V.
- (3) Max dimming ratio = 1:100.
- (4) Frequency can be adjusted in accordance with demand(120Hz minimum, or lights will be flickering)
- (5) $\eta_{\max} = V_{\text{out}(\max)} * I_{\text{outH}(\max)} / V_{\text{in}(\max)} * I_{\text{inH}(\min)}$
 $\eta_{\min} = V_{\text{out}(\min)} * I_{\text{outH}(\min)} / V_{\text{in}(\min)} * I_{\text{inH}(\max)}$

4.2 LED Driving Board Connector Pin Assignment

1. Input Connector: J3(JST S9B-PH-SM3-TB or Compatible)

PIN No	Symbol	Description
1	V _{in}	DC+
2	V _{in}	DC+
3	V _{in}	DC+
4	GND	Ground
5	GND	Ground
6	GND	Ground
7	Brightness	Brightness Control
8	Control	ON/OFF Control
9	CL	PWM or DC selection

Note: Pin9 is dimming method control pin, Low → DC dimming, High → PWM dimming.
If pin9 is be used, please NC JP1.

2. Output Connector: J1,J2(JST S2B-EH or Compatible)

PIN NO	Symbol	Description
1	Output	LED High Voltage(+)
2	Output	LED Low Voltage (-)


3. DC or PWM Connector: JP1

PIN NO	Symbol	Description
1	DC	Close pin 1,2 LED driver is DC dimming
2	GND	
3	PWM	Close pin 2,3 LED driver is PWM dimming

Note: If you use JP1 to set DC/PWM, please NC the pin9 of J3.


4.3 LED Driving Board Mechanical Characteristics




Dimension: 125 x 50 x 12.5mm

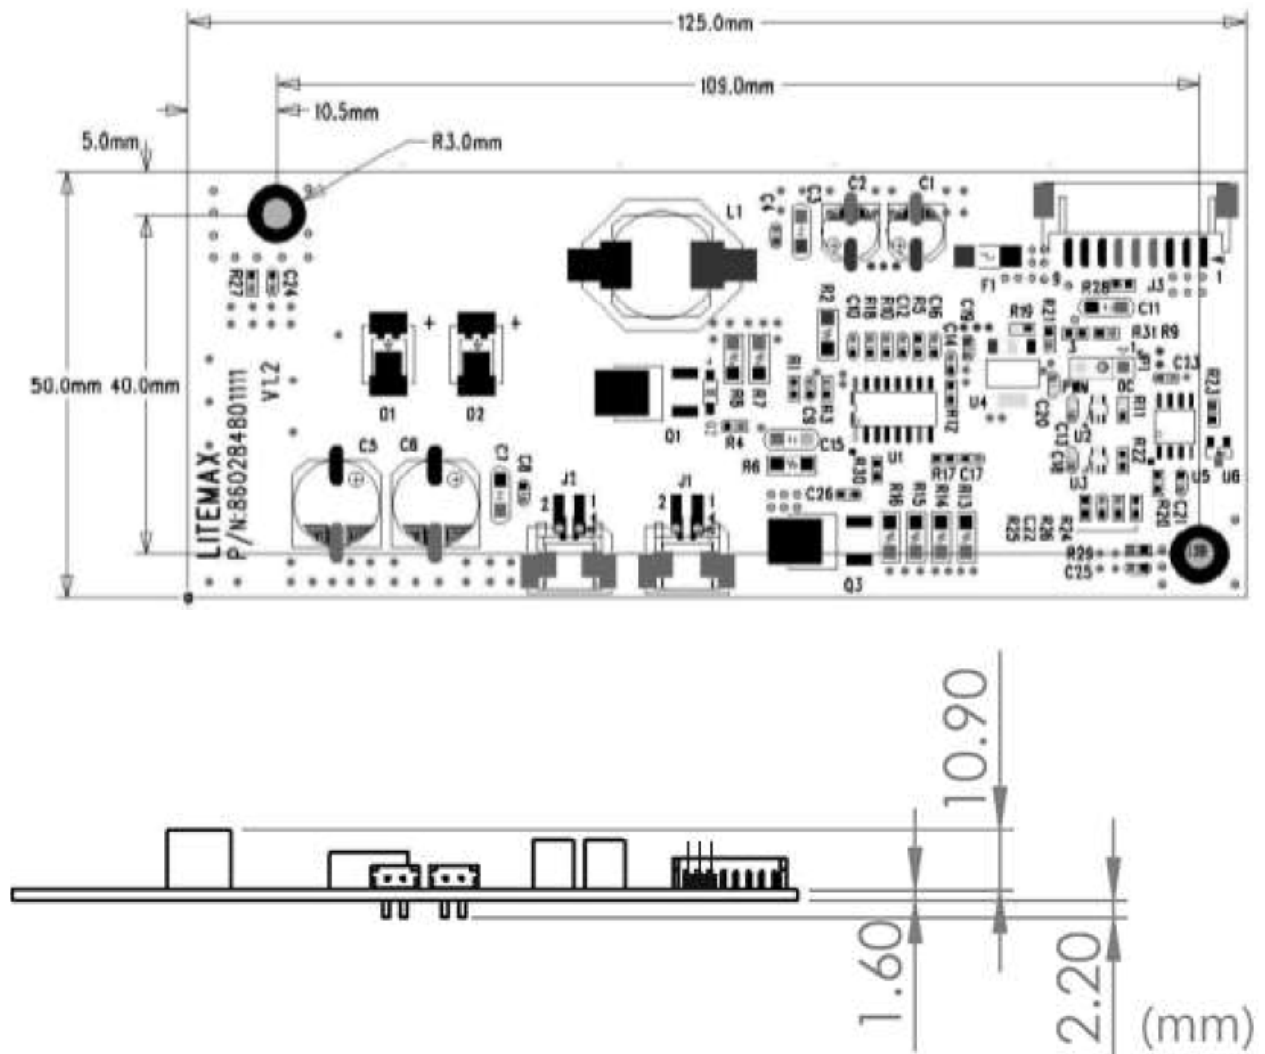


5 Mechanical Drawing

Unit:mm

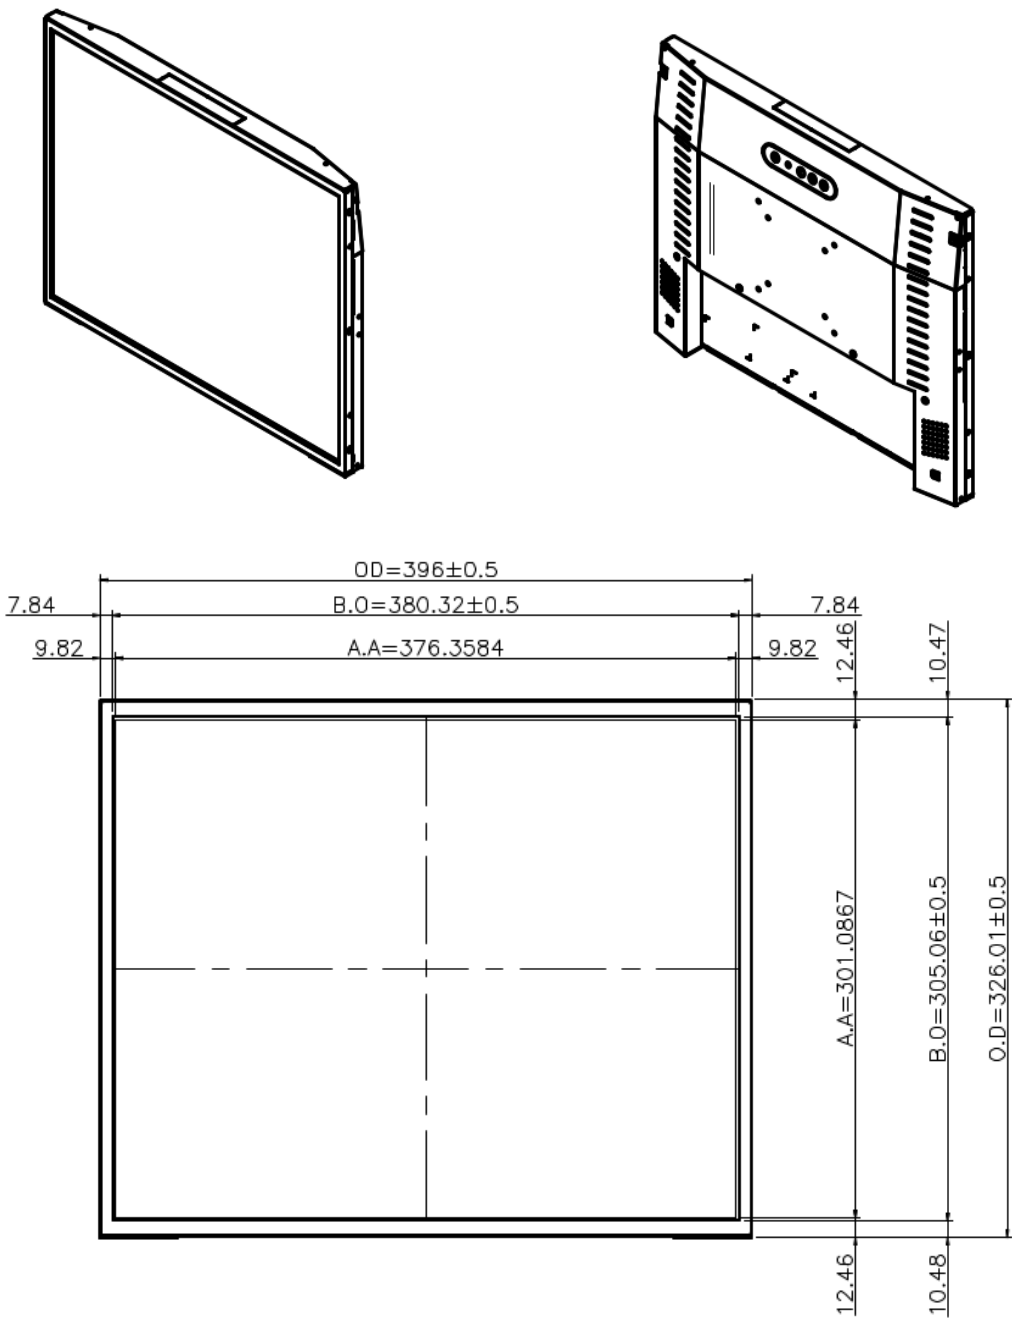

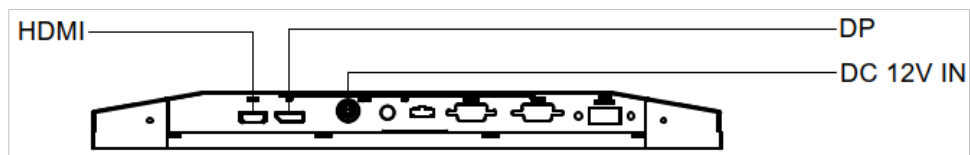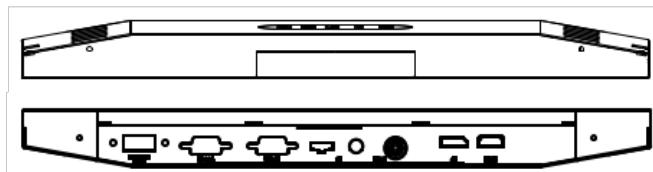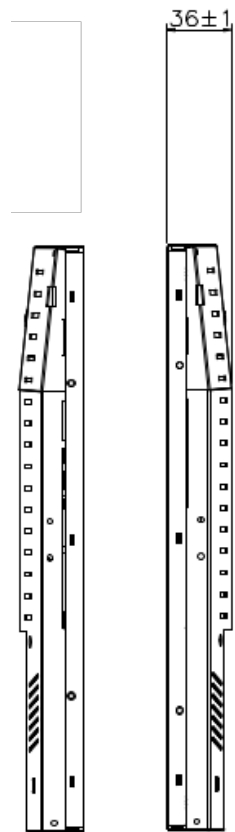

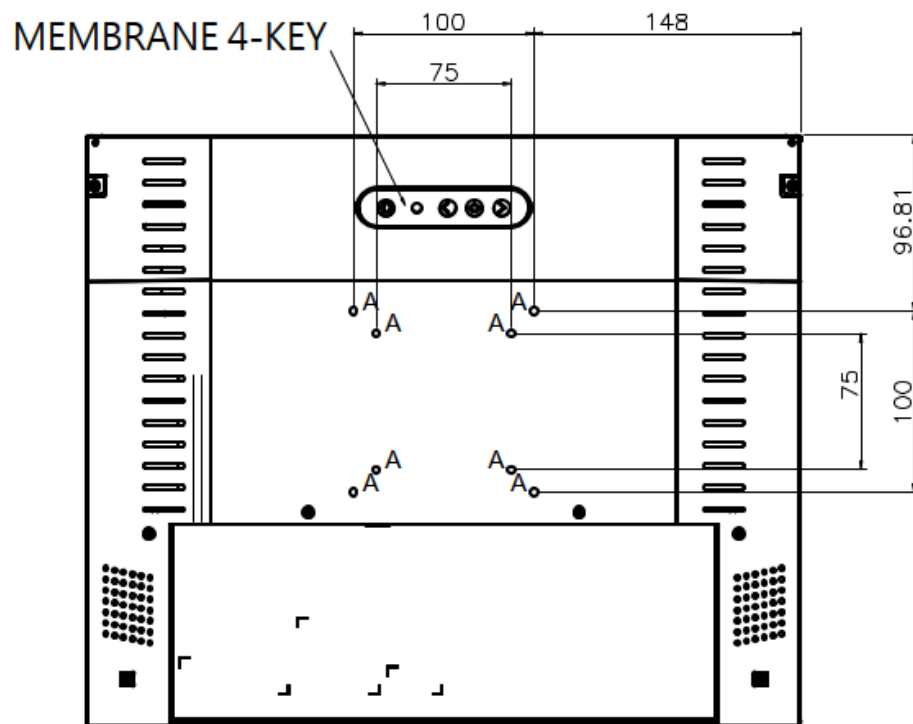


Note :
 O.D. : Outline Dimension
 B.O. : Bezel Opening
 A.A. : LCD Active Area
 A : 8-M4_USER HOLE_MAX_DEPTH=4mm

6 AD9701HP Board & OSD Functions

AD9701HP is a good performance AD board for Litemax FHD resolution display product. Input interface supports DP, HDMI. Output supports eDP, LVDS panel. Max resolution up to 1920x1080.


General Description

- Max resolution 1920 x 1080 100Hz
- One DP 1.4 , supports 1920 x 1080 100Hz
- One HDMI 2.1 , supports 1920 x 1080 100Hz
- Embedded MCU with ADC port for VR, Light Sensor application. (Optional)
- Embedded OSD.
- Support panel voltage 3.3/ 5/ 12 V
- Support eDP panel.
- Support Dual/Single LVDS
- Size 100mm x 72mm
- Support output voltage 12V(1A) or 5V(1A)

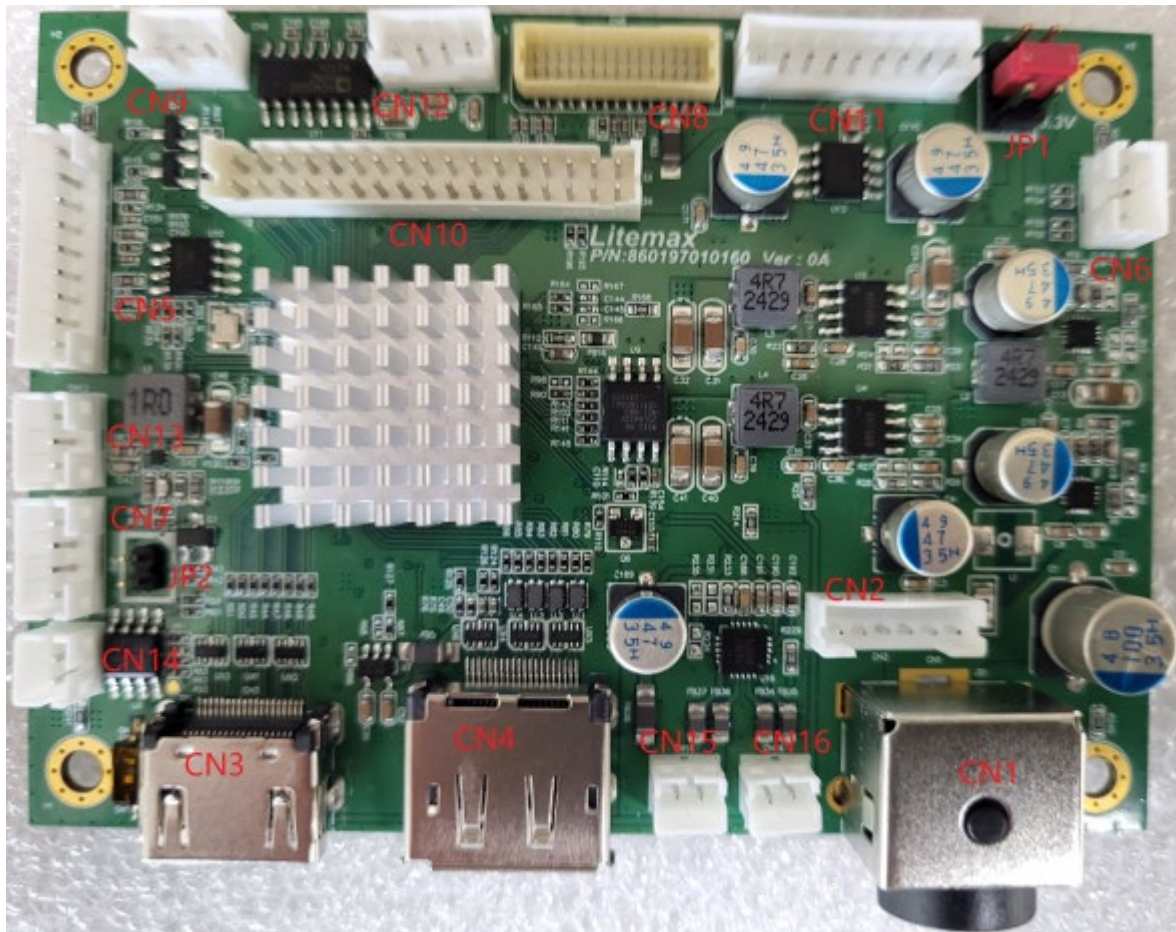

Outline Dimensions

AD9701HP 100 mm x 72mm

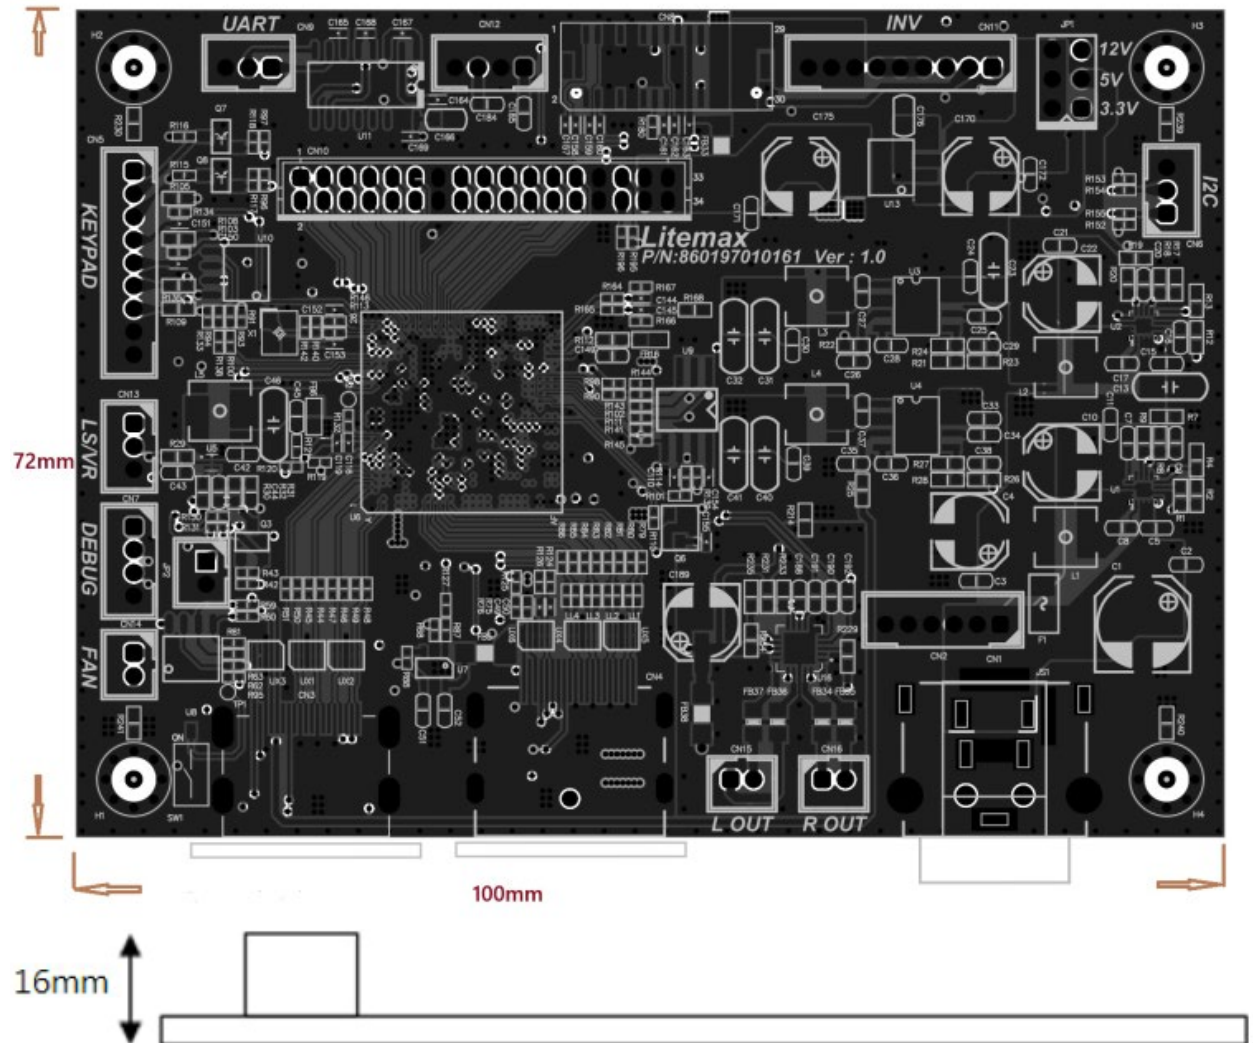

AD9701HP Board Pin Define

CN8: eDP output(Wafer 1.0mm, 15*2P)

Pin	Function	Pin	Function
1	TX0P	16	TXAUX-
2	TX0N	17	TX_HPDP
3	TX1P	18	GND
4	TX1N	19	VLCD
5	GND	20	VLCD
6	GND	21	DIM_EDP
7	NC	22	ON/OFF_EDP
8	NC	23	INVGND
9	GND	24	INVGND
10	GND	25	INVGND
11	NC	26	INVGND
12	NC	27	12INV
13	GND	28	12INV
14	GND	29	12INV
15	TXAUX+	30	12INV

CN10: LVDS output(Wafer 2.0mm,17x2P)

Pin	Function	Pin	Function
1	RX00-	18	RXE1+
2	RX00+	19	RXE2-
3	RX01-	20	RXE2+
4	RX01+	21	RXEC-
5	RX02-	22	RXEC+
6	RX02+	23	RXE3-
7	RX0C-	24	RXE3+
8	RX0C+	25	RX4-
9	RX03-	26	RX4+
10	RX03+	27	GND
11	RX04-	28	GND
12	RX04+	29	+3.3V
13	GND	30	GND
14	GND	31	VCC
15	RXE0-	32	VCC
16	RXE0+	33	VCC
17	RXE1-	34	VCC

CN4: DP input

Pin	Function	Pin	Function
1	ML_Lane3(n)	11	GND
2	GND	12	ML_Lane0(p)
3	ML_Lane3(p)	13	CONFIG1(SCL)
4	ML_Lane2(n)	14	CONFIG2(SDA)
5	GND	15	AUX_CH(p)
6	ML_Lane2(p)	16	GND
7	ML_Lane1(n)	17	AUX_CH(n)
8	GND	18	Hot_Plug
9	ML_Lane1(p)	19	Return
10	ML_Lane0(n)	20	DP_PWR

Note: Those pin13, pin14 are update FW

CN3: HDMI input

Pin	Function	Pin	Function	Pin	Function
1	RX2+	9	RX0-	17	GND
2	GND	10	TMDS Clock+	18	HDMI +5V
3	RX2-	11	HDMI DET	19	HPD
4	RX1+	12	TMDS Clock-		
5	GND	13	CEC		
6	RX1-	14	NC		
7	RX0+	15	HDMI_SCL		
8	GND	16	HDMI_SDA		

CN2: Power input (Wafer 2.0mm pitch 6 pin)

Pin	Function	Pin	Function
1	Power Input	4	GND
2	Power Input	5	GND
3	Power Input	6	GND

CN1: Power input (Power Din 4 pin)

Pin	Function	Pin	Function
1	Power Input	3	GND
2	Power Input	4	GND

CN1: Power input (Power Jack 3 pin)

Pin	Function	Pin	Function
1	Power Input	3	GND
2	GND		

CN12: Power output (Wafer 2.0mm pitch 4 pin)

Pin	Function	Pin	Function
1	+5V(1A)	3	+12V(1A)
2	GND	4	GND

CN11: Backlight Power and Control (Wafer 2.0mm pitch 9 pin)

Pin	Function	Pin	Function
1	DC/PWM SEL	6	GND
2	Enable	7	12V (Note3)
3	Dimming	8	12V (Note3)
4	GND	9	12V (Note3)
5	GND		

Note3: Pin 7,8,9 are for 12V version only. If you choose 24V version, these 3 pin are NC.

CN5: Keypad (Wafer 2.0mm pitch 9 pin)

Pin	Function	Pin	Function
1	POWER KEY	6	MENU KEY
2	GREEN LED	7	NC
3	RED LED	8	GND
4	DOWN KEY	9	GND
5	UP KEY		

CN13: Light sensor/VR (Wafer 2.0mm pitch 2 pin)

Pin	Function	Pin	Function
1	3.3V	3	GND
2	Sensor Out		

JP1: Panel power selection (2.54mm pitch 2x3 jump)

Pin	Function	Pin	Function
1-2 close	3.3V	5-6 close	12V
3-4 close	5V		

CN9: UART (Wafer 2.0mm pitch 3 pin)

Pin	Function	Pin	Function
1	TX	3	GND
2	RX		

CN6: I2C (Wafer 2.0mm pitch 3 pin)

Pin	Function	Pin	Function
1	SDA	3	GND
2	SCL		

CN16: Audio out R (Wafer 2.0mm pitch 2 pin)(2.8W 4ΩLoad)


Pin	Function	Pin	Function
1	ROUTP	2	ROUTN

CN15: Audio out L (Wafer 2.0mm pitch 2 pin) (2.8W 4ΩLoad)

Pin	Function	Pin	Function
1	LOUTP	2	LOUTN

6.1 OSD Function

MEMBRANE CONTROL BUTTOM

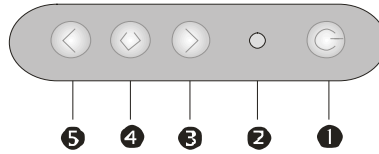

- ❶ **POWER SWITCH:** Pushing the power switch will turn the monitor on. Pushing it again to turn the monitor off.
- ❷ **Power LED:** Power ON-Green / Power OFF-No.
- ❸ **Up Key >:** Increase item number or value of the selected item.
- ❹ **Menu Key:** Enter to the OSD adjustment menu. It also used for go back to previous menu for sub-menu, and the change data don't save to memory.
- ❺ **Down Key <:** Decrease item number or item value when OSD is on.

Screen Adjustment Operation Procedure

1. Entering the screen adjustment

The setting switches are normally at stand-by. Push the **Menu Key** once to display the main menu of the screen adjustment. The adjustable items will be displayed in the main menu.

2. Entering the settings

Use the **Down Key <** and **Up Key >** buttons to select the desired setting icon and push the **SELECT** button to enter sub-menu.

3. Change the settings

After the sub-menu appears, use the **Down Key <** and **Up Key >** buttons to change the setting values.

4. Save

After finishing the adjustment, push the **SELECT** button to memorize the setting.

5. Return & Exit the main menu

Exit the screen adjustment; push the "MENU" button. When no operation is done around 10 sec (default OSD timeout), it goes back to the stand-by mode and no more switching is accepted except MENU to restart the setting.

6.2 OSD Menu

Here are some instructions for you to use the OSD (On Screen Display). By pressing the “menu”, you will see the below picture.

Timing shows resolution and V-frequency of the panel. This 2 information is not changeable by user.



There are 6 sub menus within the OSD user interface:

Brightness, Signal Select, Sound, Color, Tools, and Exit.



Brightness

When you press the “menu” button, you enter the “Brightness” sub directory. In this directory, you will see 6 selections: **Brightness Mode, OSD Brightness, Contrast, Sharpness, Auto Tune, Exit.**



Brightness Mode :

press “menu” once, you can go into the Brightness Mode.



VR: (OPTION)

press this Icon to activate the VR control of brightness.



Ambient light sensor: (OPTION)


press this Icon, must to accompany with Litemax ambient light sensor to auto dimming.






OSD Brightness :

Press the “menu” once, to adjust the brightness. Press “left” to dim down the brightness to “0”, press “right” to increase the brightness to “100”

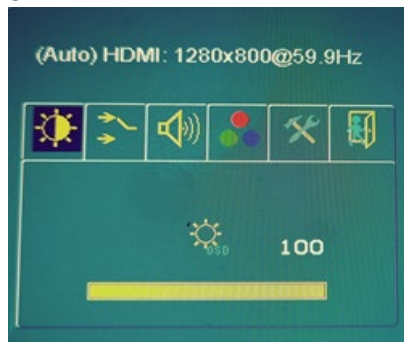


Contrast :

Press “Menu” once, you can adjust the contrast from “0” to “100” by pressing the “Left” and “Right”.

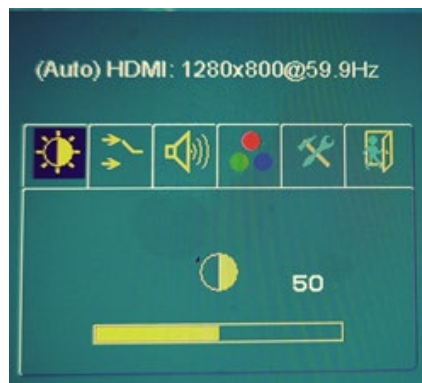

Sharpness :


Press “Menu” once, you can adjust the Sharpness from “0” to “4” by pressing the “Left” and “Right”.

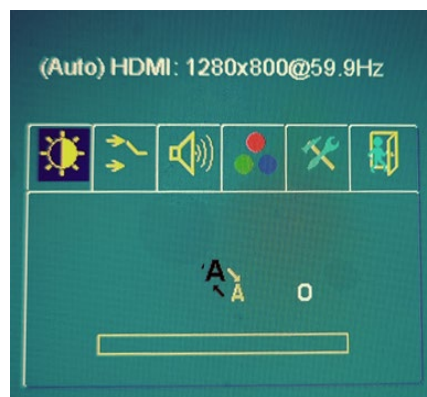



Auto Tune : (VGA only)


Press “Menu” once, you can activate the Auto Tune.

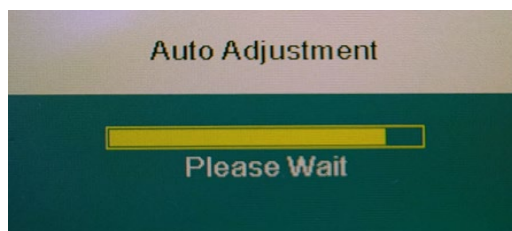

Exit: back to the beginning menu.



Input Signal: (default auto detect)

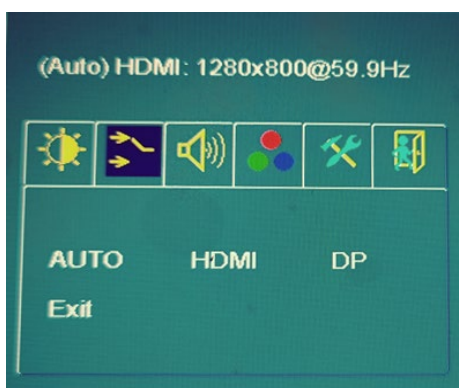

AUTO

AUTO: auto detect

HDMI

HDMI: HDMI input

DP


DP: DisplayPort input

Exit

Exit: back to the beginning menu.



Audio:

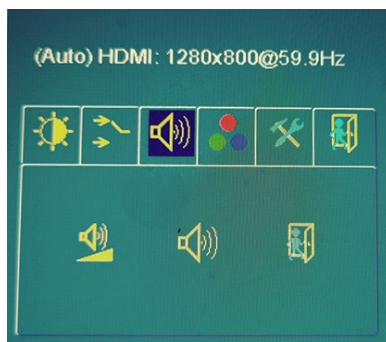

Audio Volume: Audio volume adjustment, from “0” to “100”.




UnMute/Mute: You can mute the speaker by pressing this option.



Exit: back to the beginning menu.



Color:

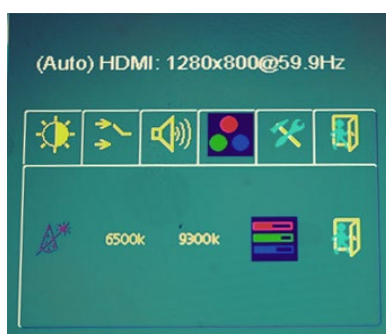

Auto Color (VGA only) :

By navigating over to the “Auto Color” option, optimal color performance is invoked.



Color Tempture_6500K: Warm color scheme.



Color Tempture_9300K: Cold color scheme.




Color Temperature User Define: Default is 100 for “R”, “G”, and “B”. Range is “0” to “255”.



Exit: back to the beginning menu.



Other Setting:

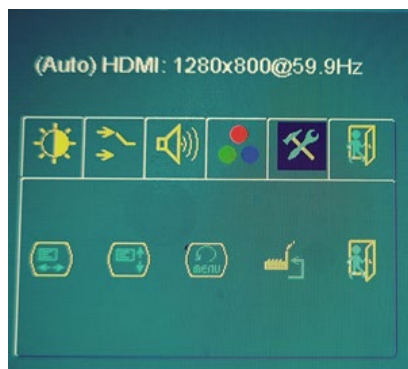

HPos: You can shift the screen horizontally using this function.



VPos: You can shift the screen vertically using this function.



Rotation: You can rotate the screen to 0° (No) 、 270° (Yes).




Load Default: You can load the default data using this function.




Exit: back to the beginning menu.

< Hot Key >

Left click to display brightness adjustment.

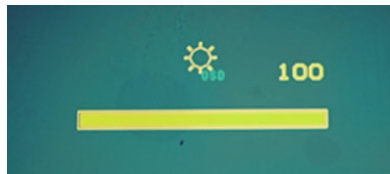


Right click to display Input Source Menu.

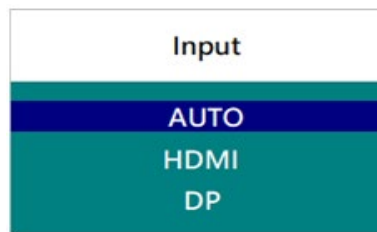


<Others>

Signal Information will be displayed after powering on or switching the signal.

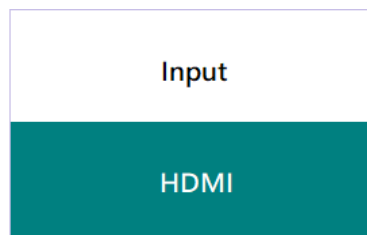


(Signal Information)

NO VIDEO INPUT will be displayed when there is no signal input.

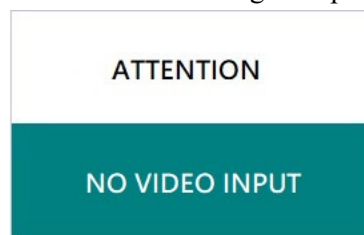

(No Video Input)

CHECK CABLE CONNECTION will be displayed when the signal cable is not connected.

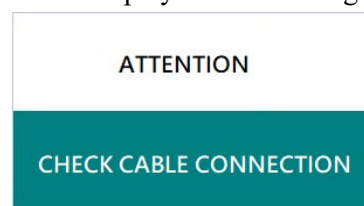

(Check Cable Connection)

7 Precautions

7.1 Handling and Mounting Precautions

- (1) The module should be assembled into the system firmly by using every mounting hole. Do not apply rough force such as bending or twisting to the LCD during assembly.
- (2) You should consider the mounting structure so that uneven force (ex. Twisted stress, Concentrated stress) is not applied to the module. And the case on which a module is mounted should have sufficient strength so that external force is not transmitted directly to the LCD module.
- (3) While assembling or installing LCD modules, it can only be in the clean area. The dust and oil may cause electrical short or damage the polarizer.
- (4) Use fingerstalls or soft gloves in order to keep display clean during the incoming inspection and assembly process.
- (5) Do not press or scratch the surface harder than a HB pencil lead on the panel because the polarizer is very soft and easily be scratched.
- (6) Please attach the surface transparent protection film to the surface in order to protect the polarizer. Transparent protection film should have sufficient strength in order to resist external force.
- (7) When the transparent protection film is peeled off, static electricity is generated between the film and polarizer. This should be peeled off slowly and carefully by people who are electrically grounded and with well ion-blown equipment or in such a condition, etc.
- (8) If the surface of the polarizer is dirty, please clean it by some absorbent cotton or soft cloth. Do not use Ketone type materials (ex. Acetone), Ethyl alcohol, Toluene, Ethyl acid or Methyl chloride. It might permanently damage the polarizer due to chemical reaction.
- (9) Wipe off water droplets or oil immediately. Staining and discoloration may occur if they left on panel for a long time.
- (10) If the liquid crystal material leaks from the panel, it should be kept away from the eyes or mouth. In case of contacting with hands, legs or clothes, it must be washed away thoroughly with soap.
- (11) Protect the LCD module from static electricity, it may cause damage to the C-MOS Gate Array IC.
- (12) Do not disassemble the module.
- (13) Do not pull or fold the lamp wire.
- (14) Pins of I/F connector should not be touched directly with bare hands.

7.2 Storage Precautions

- (1) High temperature or humidity may reduce the performance of LCD module. Please store LCD module within the specified storage conditions.
- (2) If possible store them in a dark place. Do not expose the module to sunlight or fluorescent light. Keep the temperature between 5°C and 35°C at normal humidity.
- (3) It is dangerous that moisture come into or contacted the LCD module, because the moisture may damage LCD module when it is operating.
- (4) The polarizer surface should not come in contact with any other object. It is recommended that they be stored in the container in which they were shipped.

7.3 Operation Precautions

- (1) Do not pull the I/F connector in or out while the LCD module is operating.
- (2) Always follow the correct power on/off sequence when LCD module is connecting and operating. This can prevent the CMOS LSI chips from damage during latch-up.
- (3) Response time depends on the temperature. (In lower temperature, it becomes longer.)
- (4) Brightness depends on the temperature. (In lower temperature, it becomes lower.)
- (5) Be careful for condensation at sudden temperature change. Condensation makes damage to polarizer or electrical contacted parts. And after fading condensation, smear or spot will occur.
- (6) Module has high frequency circuits. Sufficient suppression to the electromagnetic interference shall be done by system manufacturers. Grounding and shielding methods are very important to minimize the interference.
- (7) Please do not give any mechanical and/or acoustical impact to module. Otherwise, module can't be operated its full characteristics perfectly.
- (8) Since a module is composed of electronic circuits, it is not strong to electrostatic discharge. Make certain that treatment persons are connected to ground through wrist band etc. And don't touch interface pin directly.
- (9) Do not display the fixed pattern for a long time because it may cause image sticking.
- (10) In order to prevent image sticking, periodical power-off or screen save is needed after fixed pattern long time display.
- (11) Black image or moving image is strongly recommended as a screen save.
- (12) Static information display recommended to use with moving image. Cycling display between 10 minutes' information (static) display and 10 seconds' moving image.
- (13) Background and character (image) color change is recommended. Use different colors for background and character, respectively. And change colors themselves periodically.
- (14) LCD system is required to place in well-ventilated environment. Adapting active cooling system is highly recommended.
- (15) Product reliability and functions are only guaranteed when the product is used under right operation usages.
- (16) If product will be used in extreme conditions, such as high temperature/ humidity, shock and vibration it is strongly recommended to contact Litemax for filed application engineering advice. Otherwise, its reliability and function may not be guaranteed. Extreme conditions are commonly found at airports, transit stations, taxi-top, in vehicle and controlling systems.

8 Disclaimer

All information in this document are subject to change, please constant LiteMax for any new design.