



LITEMAX

UPO1002-M
100" LED B/L LCD

User Manual

Approved by	Checked by	Prepared by

LITEMAX Electronics Inc.
8F, No.137, Lane 235, Bau-chiau Rd.,
Shin-dian Dist., New Taipei City, Taiwan
R.O.C.
Tel : 886-2-8919-1858
Fax: 886-2-8919-1300
Homepage: <http://www.litemax.com>

Contents

Contents	2
I. Introduction	3
II. Product Functions	3
1. Startup Interface and Overview	3
2. Top Status Bar	4
3. App Center	4
4. Calculator	5
5. File Quick Transfer.....	6
6. Mode Switching	9
7. Settings	11
(1) General	11
(2) Wallpaper.....	12
(3) Wired Network.....	13
(4) Wireless Network	13
(5) Hotspot.....	14
(6) Bluetooth	15
(7) Auto Sleep	16
(8) Scheduled Power On/Off	16
(9) Channel Settings.....	17
(10) Language and Input Method.....	18
(11) Time and Date	19
(12) Sound	19
(13) Application Management	20
(14) System Information.....	21
(15) System Update	21
8. Polling Tool	22
9. Welcome	24

I. Introduction

This manual is intended for all users of the lightweight conference display and provides a reference for beginners.

II. Product Functions

1. Startup Interface and Overview

- Wallpaper: You can select a preferred wallpaper or set a custom wallpaper under Settings > Wallpaper.
- Screen Casting Information: Displays instructions for using the screen-casting dongle, software-based casting methods, and the casting code.
- App Icons: Tap an icon to open the corresponding application.




2. Top Status Bar

The top bar displays the time, Wi-Fi, hotspot status, connected USB drive indicator, and casting code in sequence.


3. App Center

- Applications are categorized by content, including Featured Recommendations, Video on Demand, Music & Entertainment, Classic Games, Education, Sports & Health, System Tools, More Apps, and Filter. You can download the required software as needed.

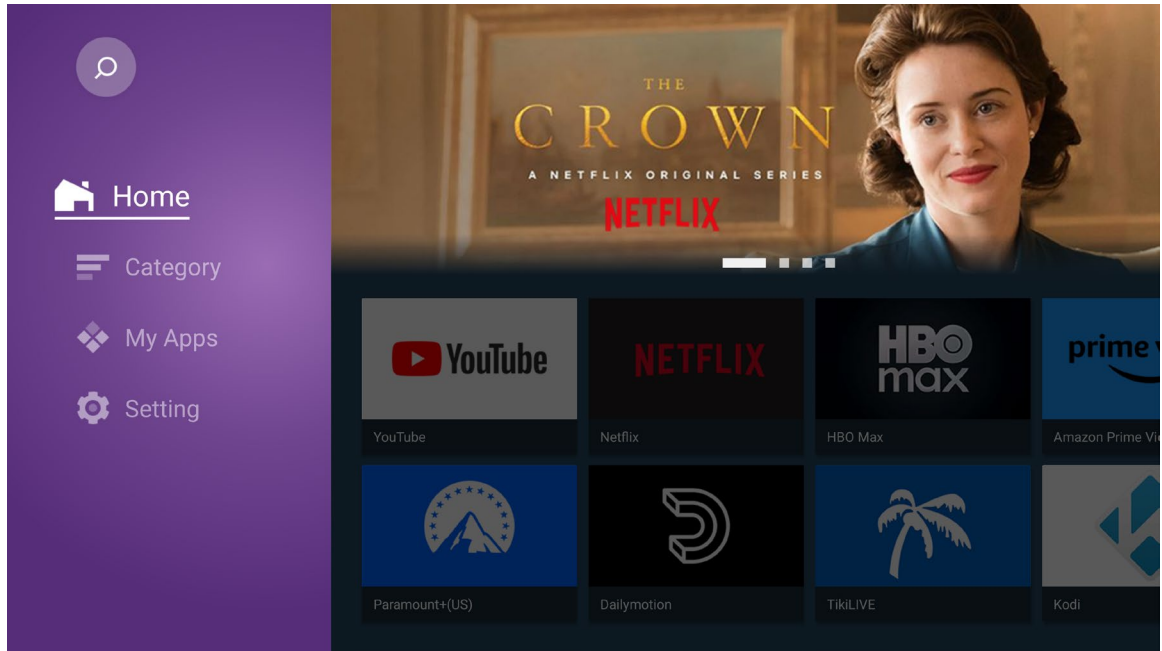


4. Calculator

- Tap the Calculator app to open the quick calculator.

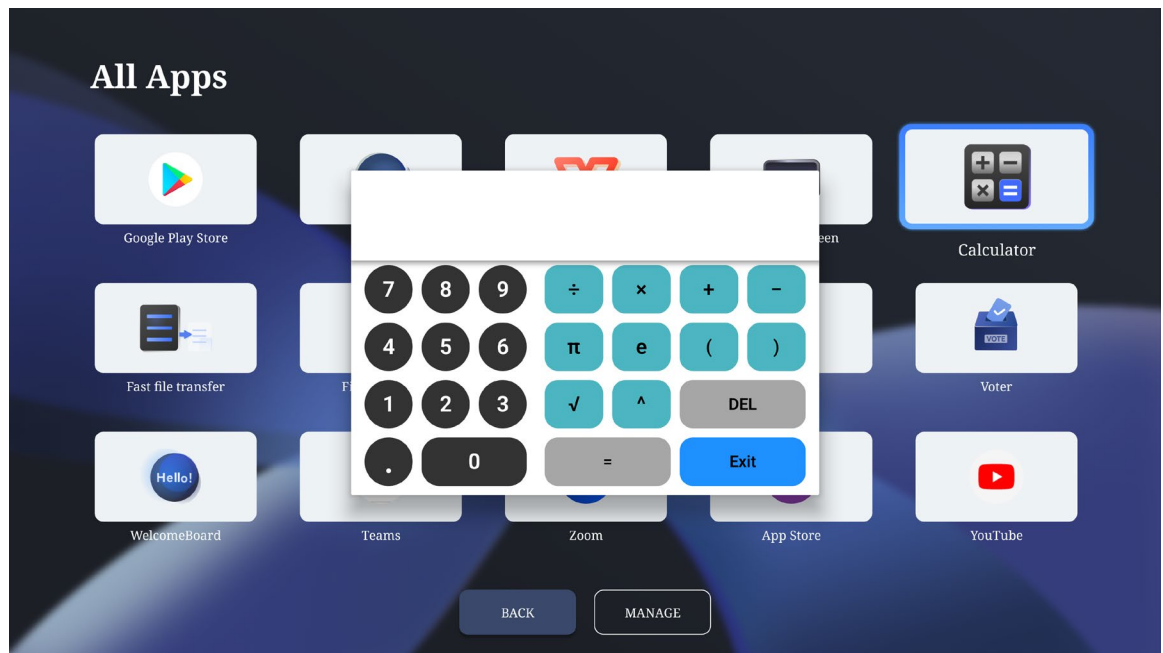


5. File Quick Transfer

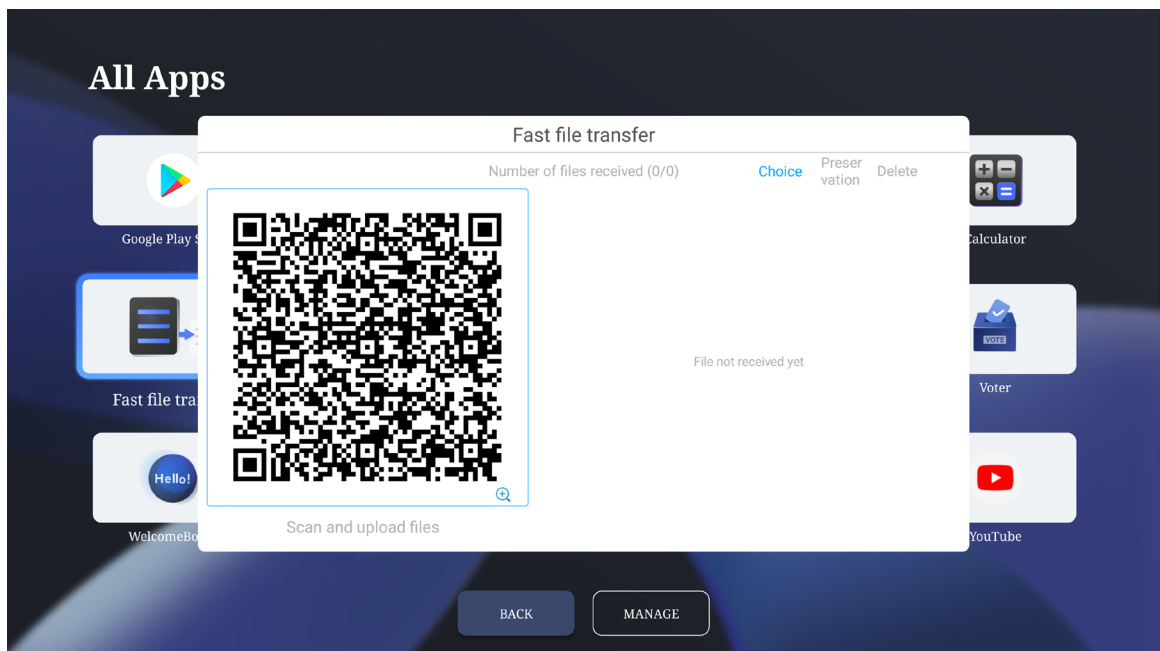




File Quick Transfer is an application that quickly uploads images and text from a mobile phone to the all-in-one device for easy sharing and presentation. The basic operation process is as follows:

- (1) Tap the app icon to enter the application.
- (2) Use your mobile phone to scan the QR code on the screen and enter the file upload page.
- (3) Select images, videos, or files on the mobile phone, then tap Done to upload them.
- (4) After the upload is successful, the all-in-one device will display the most recently uploaded images, videos, or files.

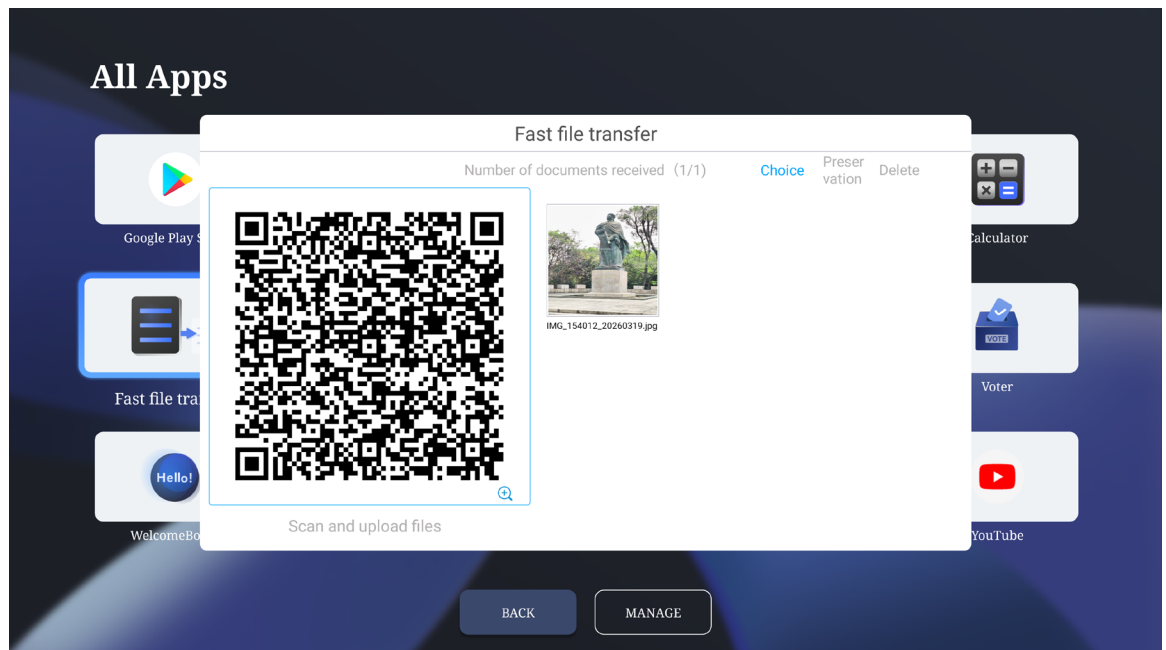

- (5) Tap Select in the upper-left corner to save or delete files.
- (6) When closing the Quick Transfer app, a reminder will appear: after shutdown, uploaded but unsaved files will be cleared.

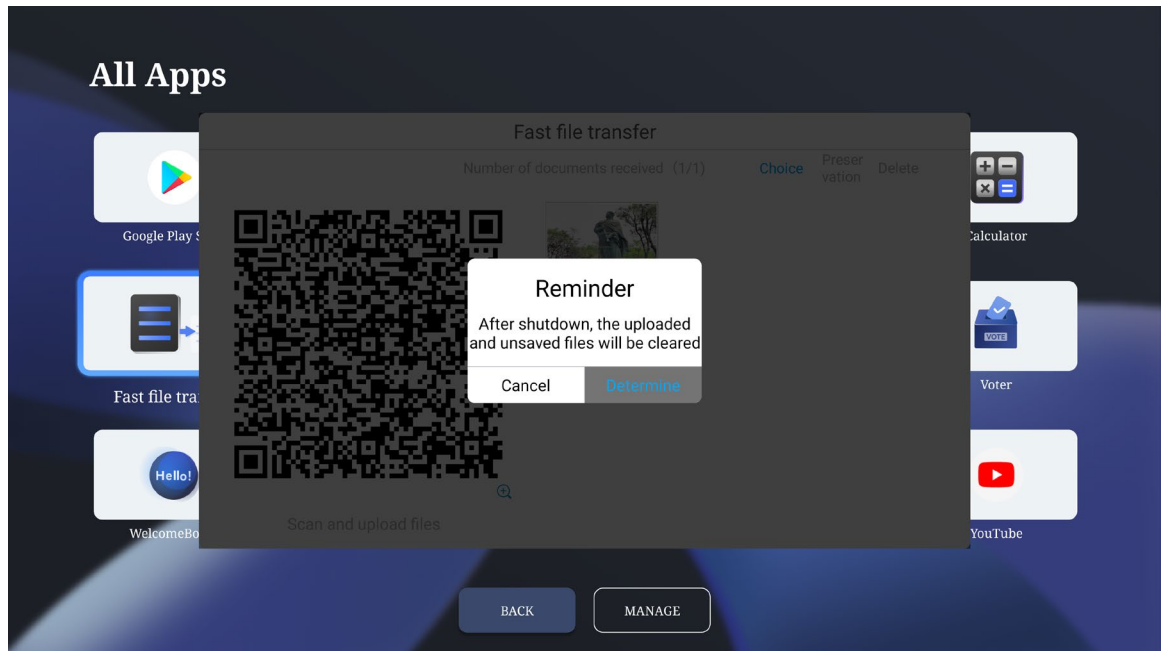

6. Mode Switching


Mode Switching is used to switch between Meeting Mode and Entertainment Mode. You can select the required mode according to actual needs.



The screen displayed after entering Meeting Mode:




The screen displayed after entering Entertainment Mode:

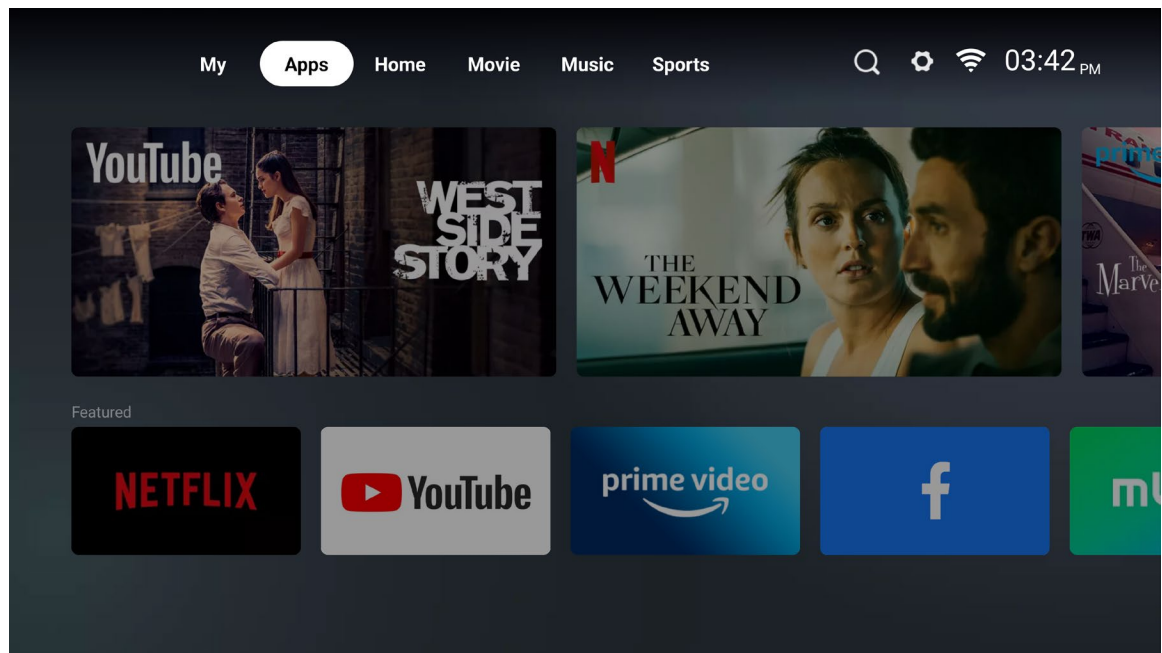

7. Settings


(1) General

- Eye Protection Mode: If color contrast causes visual fatigue, enable Eye Protection Mode to help protect your eyes.
- Brightness Adjustment: Adjusts the backlight brightness. A lower value makes the screen darker.
- Startup Mode: Select either power-on startup or power-on standby.
- Desktop Switching: Select the desktop environment after system startup. Meeting Mode and Entertainment Mode are available.

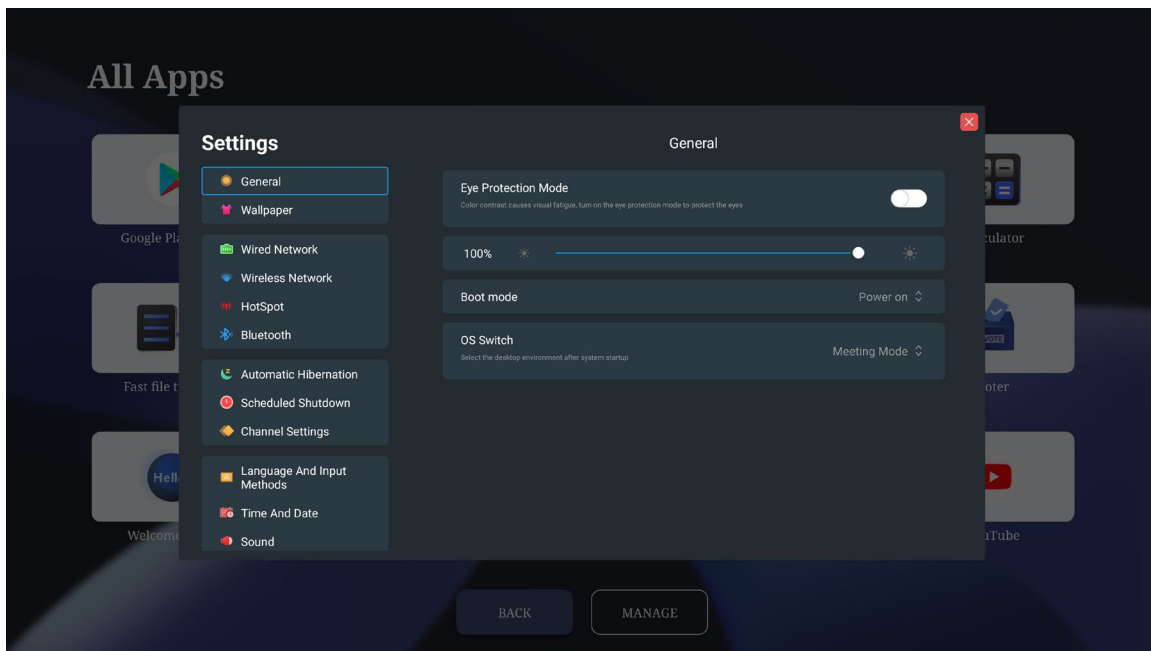


(2) Wallpaper

In addition to the default wallpapers provided by the system, you can add custom wallpapers.

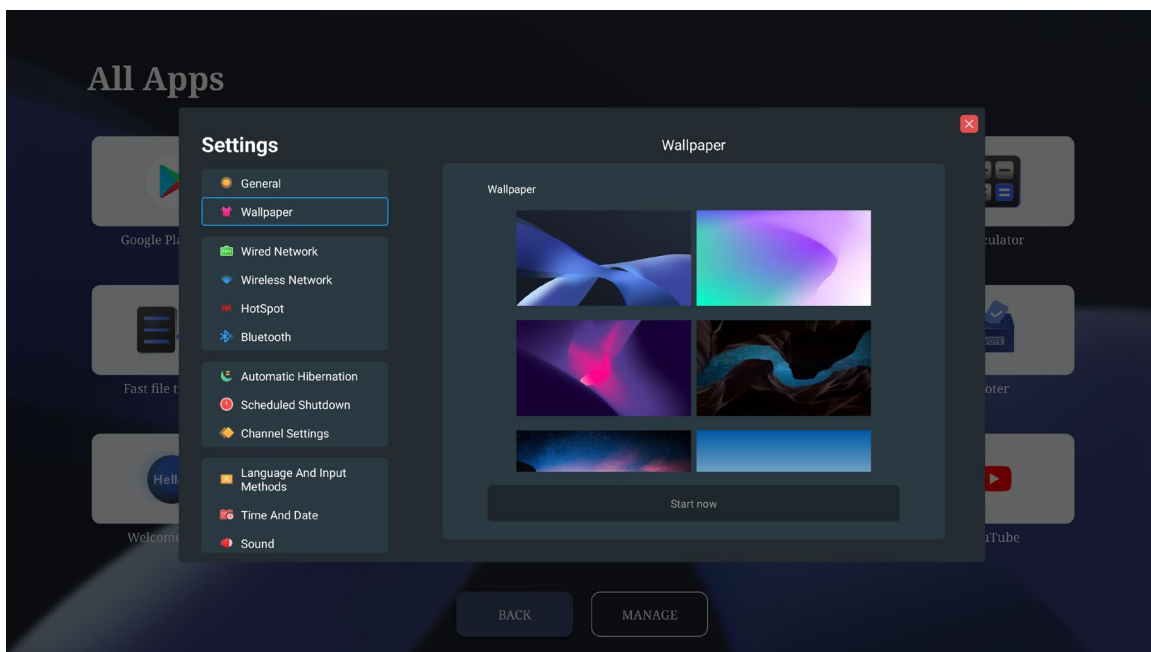


(3) Wired Network

After connecting to a wired network, the IP address, subnet mask, default gateway, DNS server, and MAC address information will be displayed.

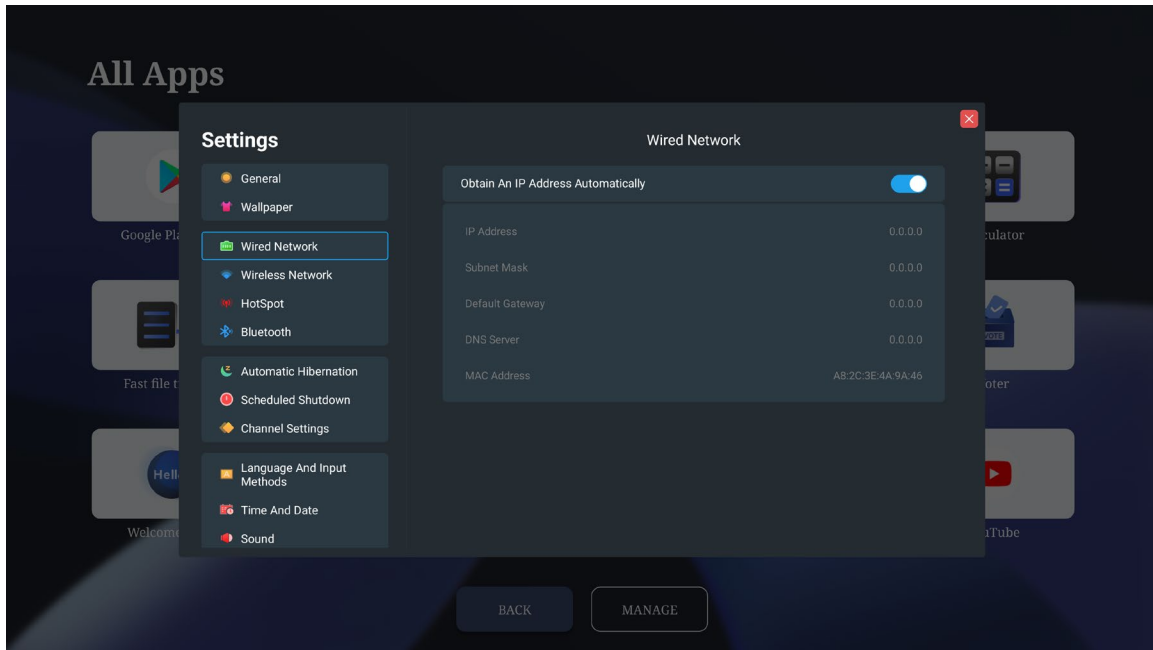


(4) Wireless Network

- Switch: Tap to turn the wireless network on or off.
- Connected Network: Displays the name of the connected network.
- WLAN Preferences
 - ① Turn on WLAN Automatically: When a saved high-quality network is nearby, WLAN will be turned back on automatically.
 - ② Notify When Public Networks Are Nearby: Notifies you when a high-quality network is available.
 - ③ Certificate Installation: WLAN certificate installer.
- Available Networks: Refreshes the network list.
- Connect to a Network: Tap any network in the list and enter the login password to connect.

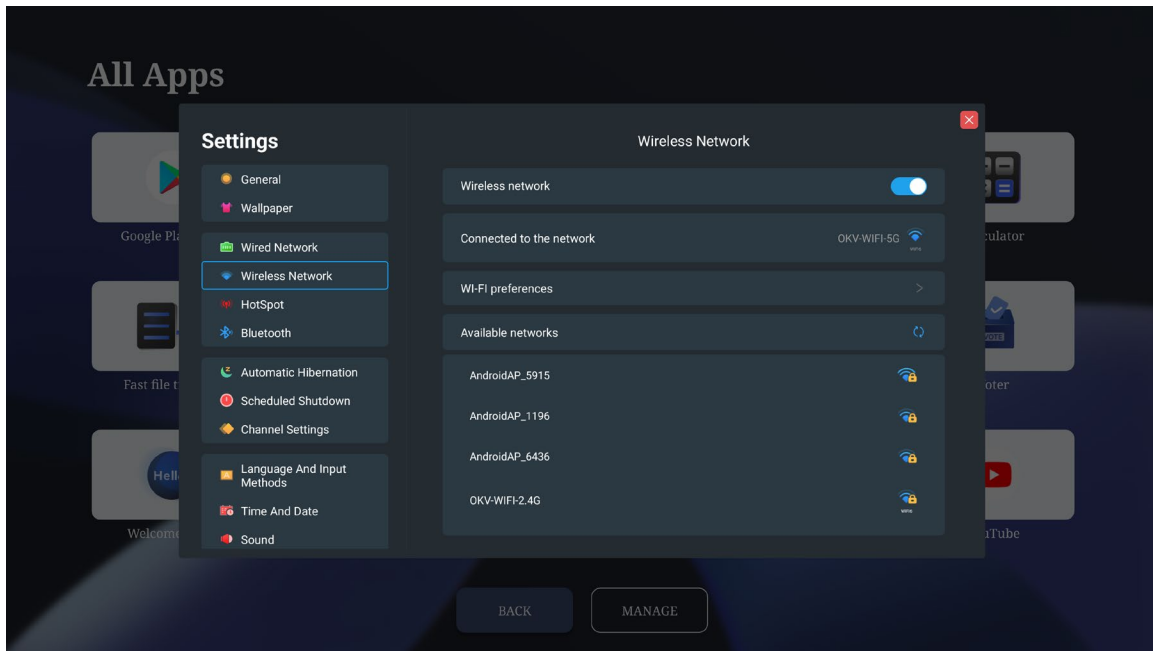


(5) Hotspot

- Switch: Tap to turn the hotspot on or off.
- Network Frequency: Select either the 5 GHz or 2.4 GHz frequency band.
- Name: The display name of the hotspot.
- Password: Displays the current hotspot password.
- Encryption Method: Determines whether a password is required to connect to the hotspot.
- Save: After modifying the hotspot settings, tap Save to apply the changes.

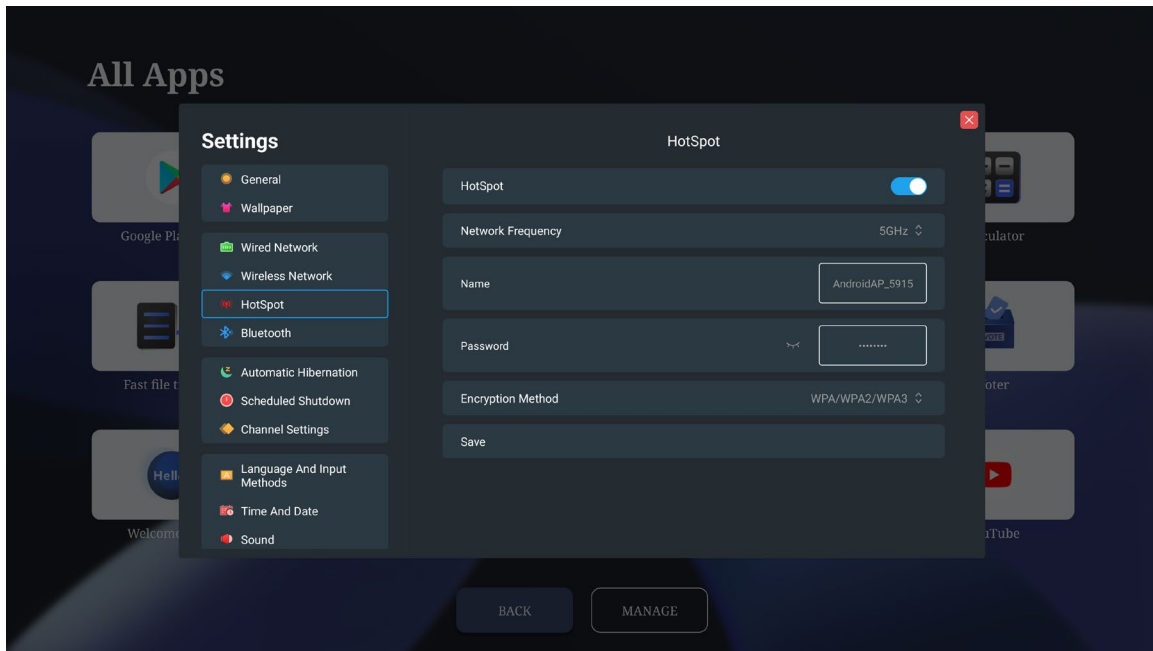


(6) Bluetooth

After Bluetooth is enabled, you can search for devices, transfer files, or find and connect to other Bluetooth devices, including but not limited to mice, keyboards, headsets, speakers, mobile devices, PCs, and general or unidentified devices.

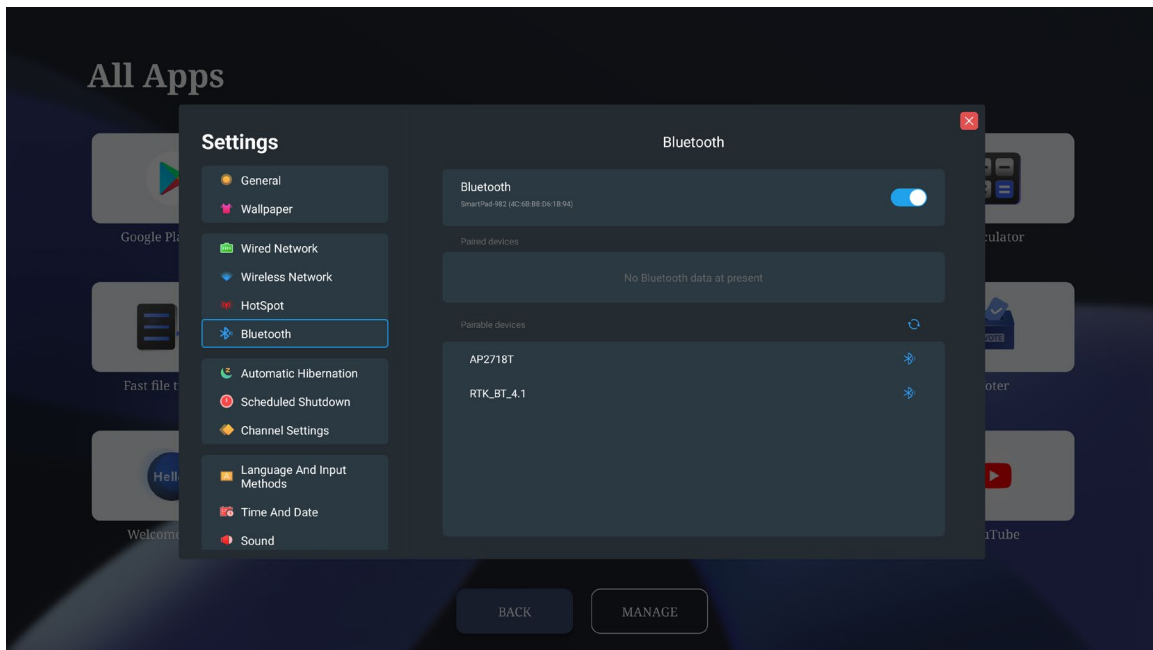


(7) Auto Sleep

- Auto Sleep: The device automatically enters sleep mode when it is not being operated.
- No-Operation Sleep Time: The device enters sleep mode when there is no operation within the specified time.
- Screen Saver: The screen saver mode executed after entering sleep mode.
- Screen Saver Selection: After entering sleep mode, the screen can display a clock or kaleidoscope.
- Preview Screen Saver: Displays the effect after a screen saver is selected.

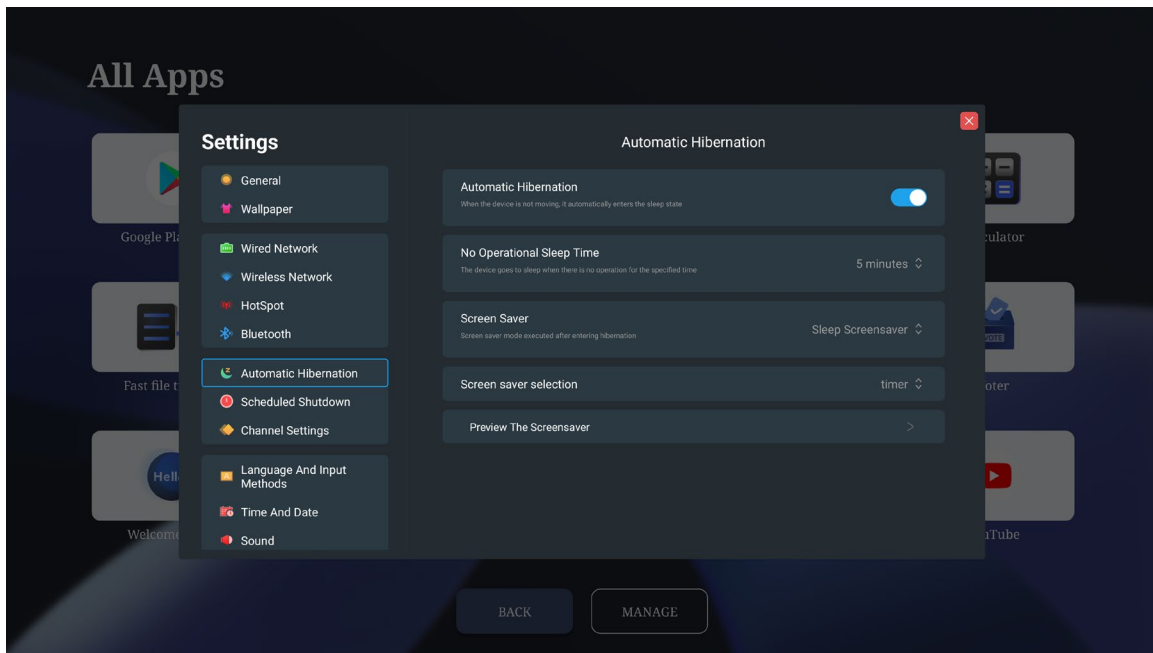


(8) Scheduled Power On/Off

- Set a daily schedule for the device to automatically power on or power off at the specified time.

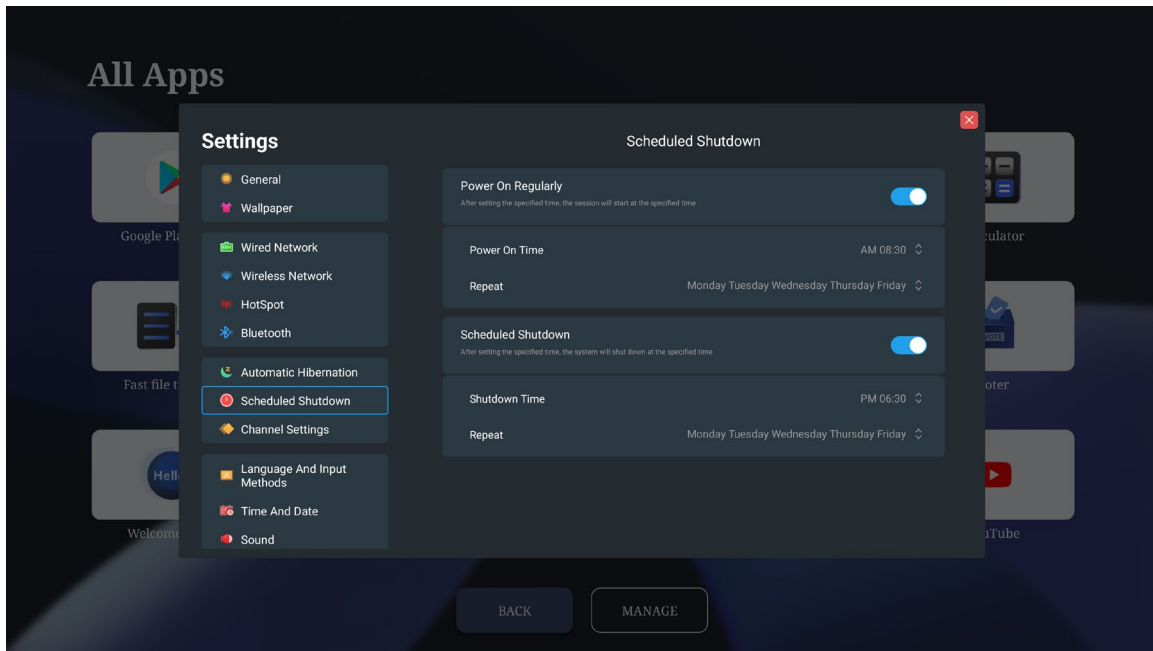


(9) Channel Settings

- Smart Detection: When a signal source is detected, a prompt dialog will pop up for switching.
- Startup Channel: The channel entered after startup.
 - ① Previous Channel: After startup, the device returns to the channel used before shutdown.
 - ② Default Startup Channel: After startup, you can choose to enter Android, HDMI1, or HDMI2.
- No-Signal Blue Screen: When no signal source is connected, this switch controls whether the screen displays a blue background.

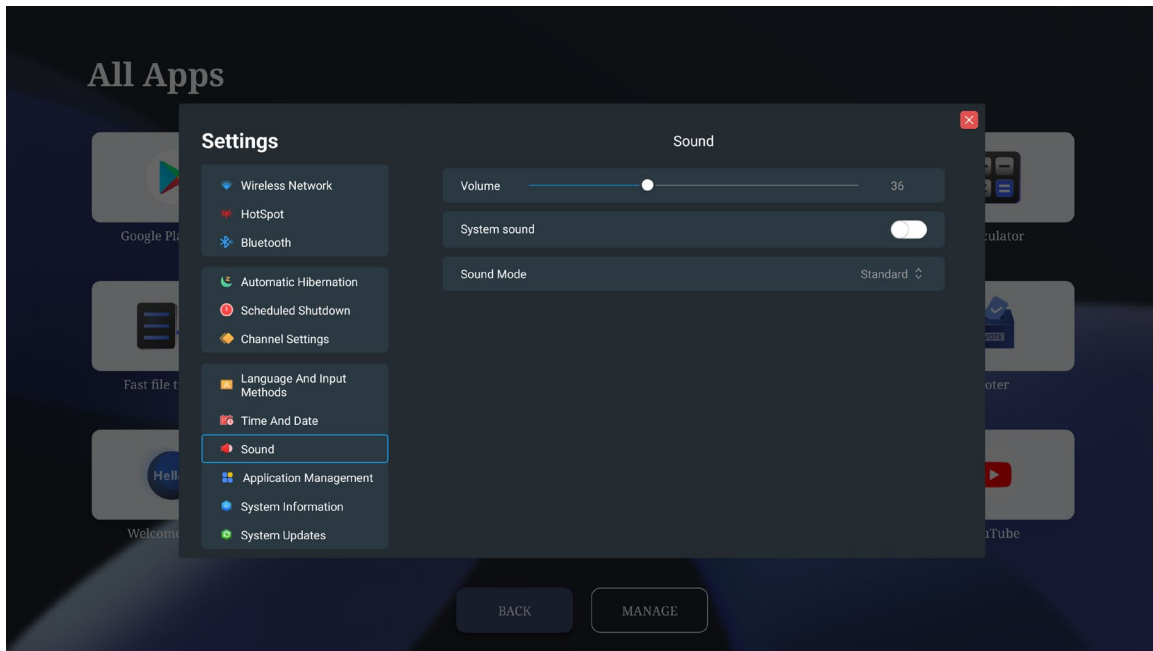


(10) Language and Input Method

- Language Settings: Currently supports 9 languages: Simplified Chinese, Japanese, German, English, Spanish, French, Portuguese, Russian, and Korean.
- Input Method Settings: Select an input method.

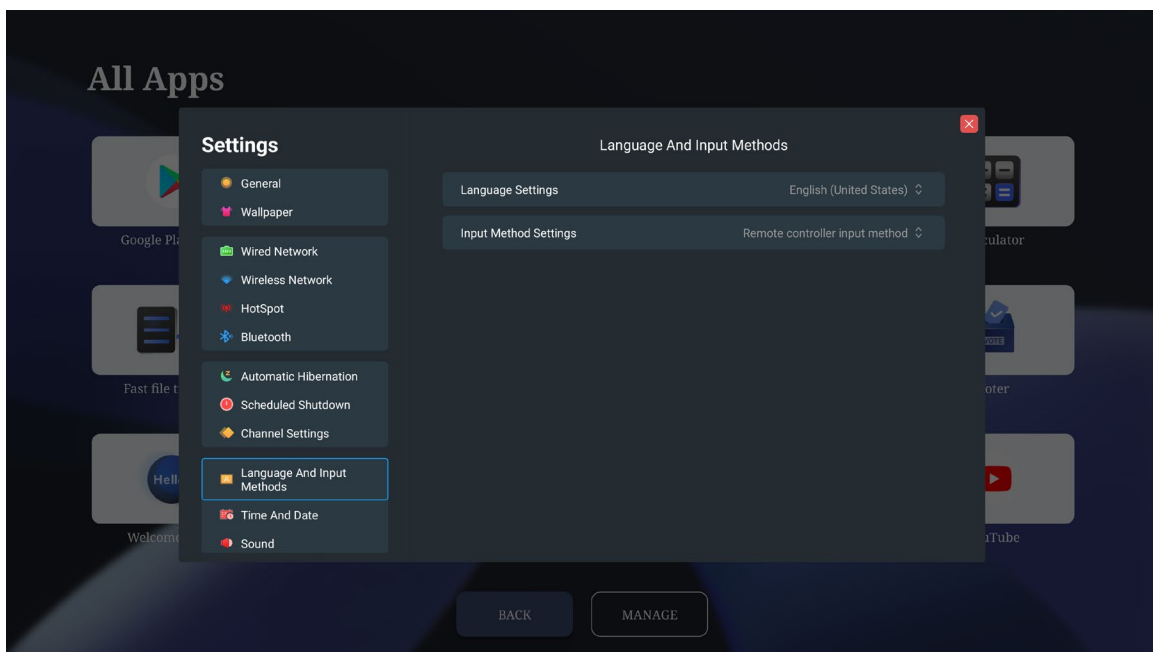


(11) Time and Date

- Set Time Automatically: When enabled, the device automatically synchronizes network time. A network connection is required.
- Set Time, Set Date, and Select Time Zone: Tap to adjust the date, time, and time zone. Automatic update must be turned off before these settings can be changed.
- 24-Hour Format: The display format for time.

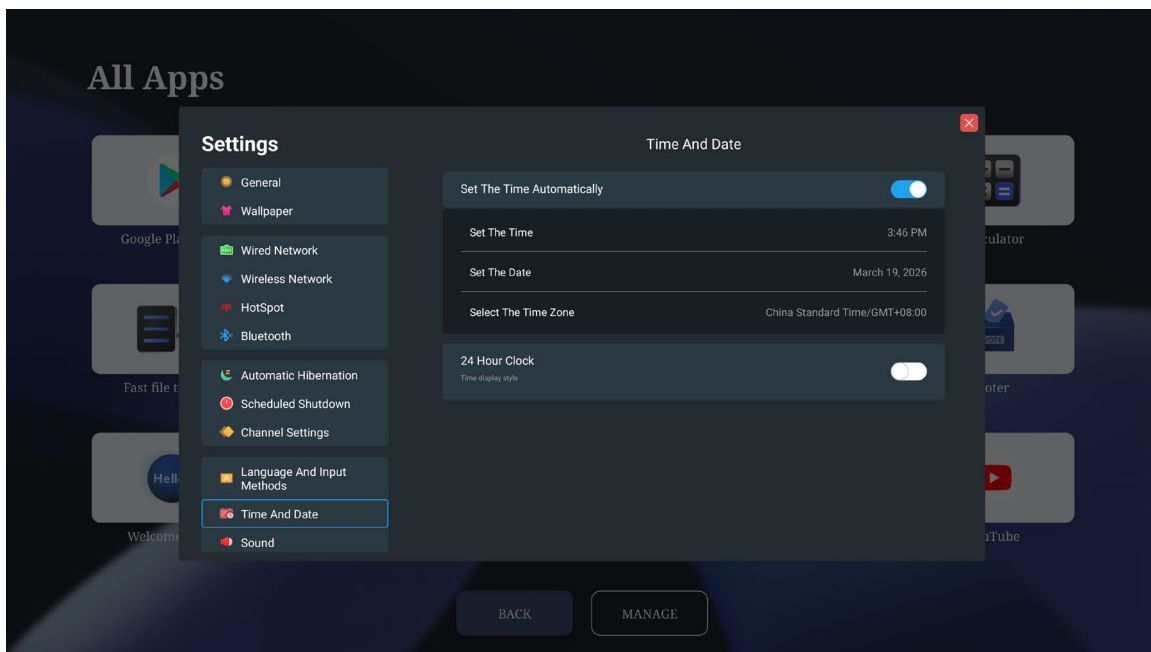


(12) Sound

- Volume: Sets the system playback volume percentage. The same function can be performed using the Volume + and Volume - buttons on the remote control.
- System Sound: A prompt tone is played when the selection box is moved using the remote control.
- Sound Mode: Standard, Music, News, Movie, Game, and User sound modes are available. Select a sound mode according to personal preference.

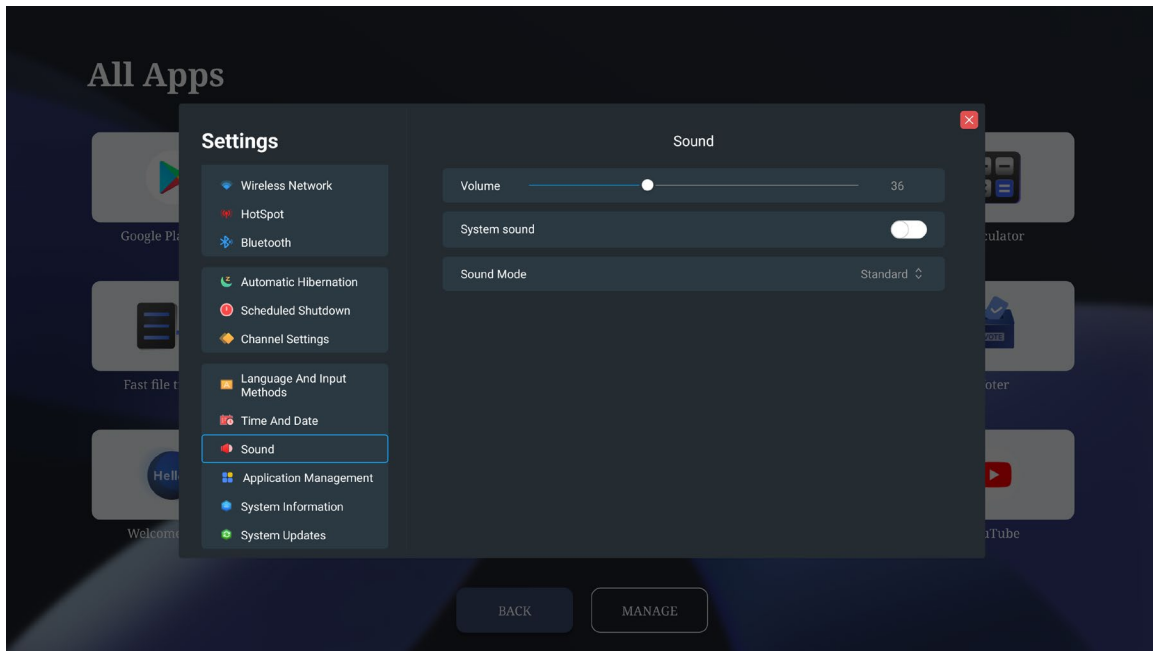


(13) Application Management

View application size, clear app data, clear default actions, or uninstall applications. Pre-installed applications cannot be uninstalled.

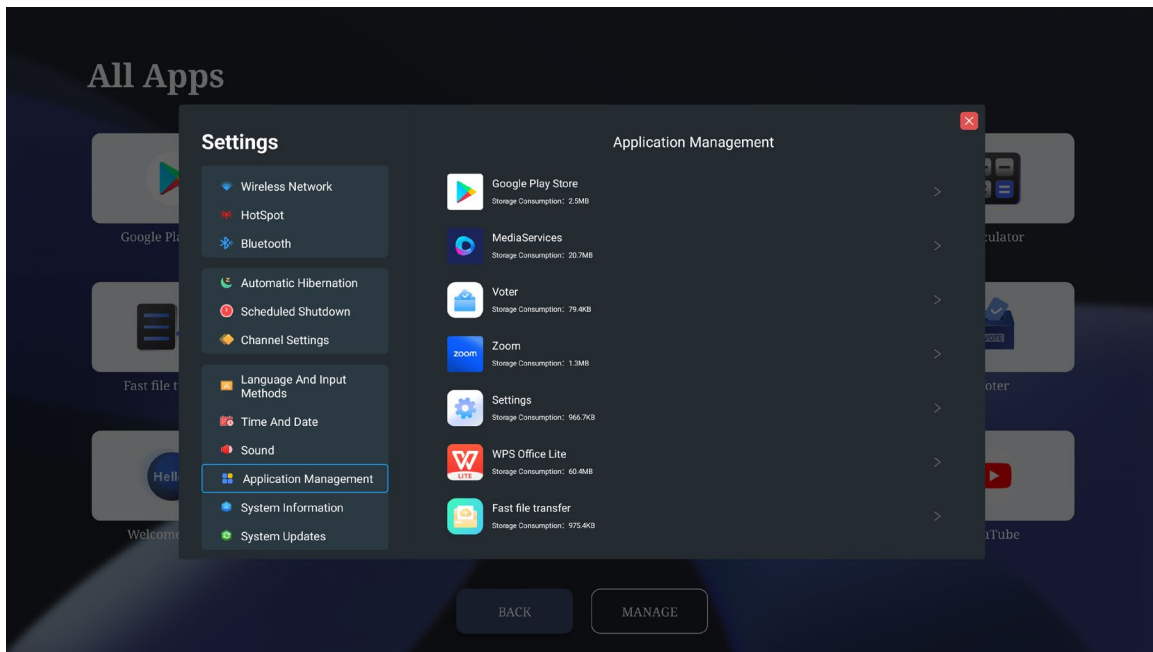


(14) System Information

- Model: The current name of the lightweight conference display.
- Software Version: The software version currently used by the lightweight conference display.
- System Version: Android version number.
- Memory Information: Displays the used and unused RAM.
- Storage Space: Displays the used and unused storage capacity.
- Uptime: Displays the time from when the lightweight conference display is powered on until it is shut down.

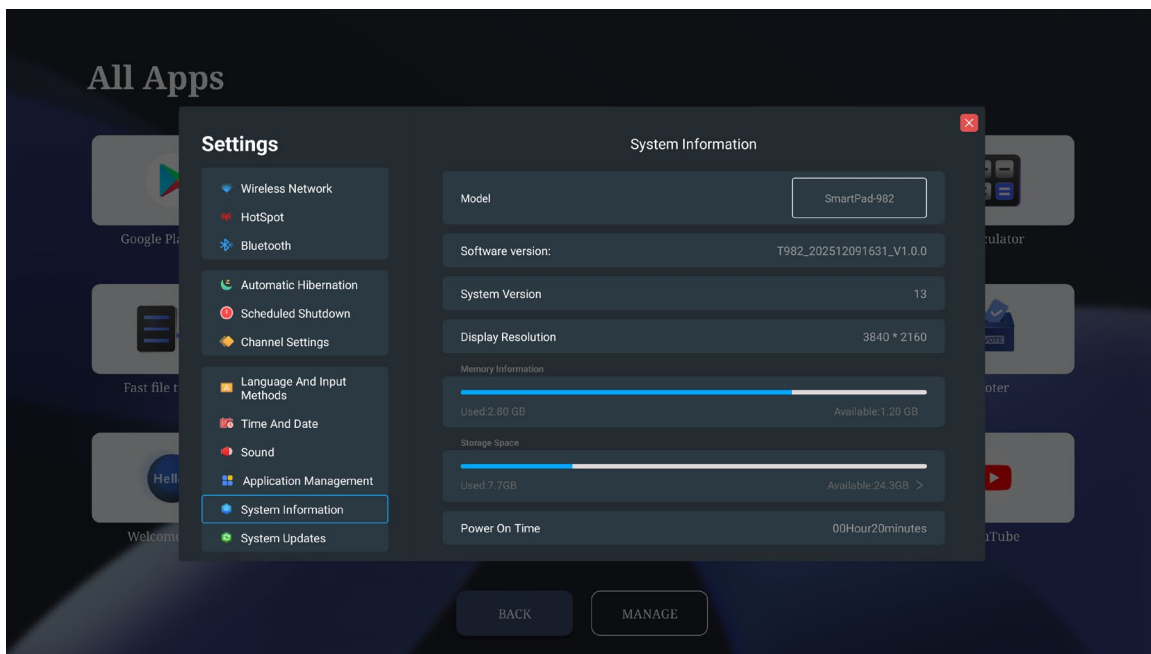



(15) System Update

- Factory Reset: Restores the lightweight conference display to its initial factory state.
- Local Update: Tap and select an upgrade package to update the software version.
- Online Update: When connected to the network, use Online Update to check whether a new version is available.

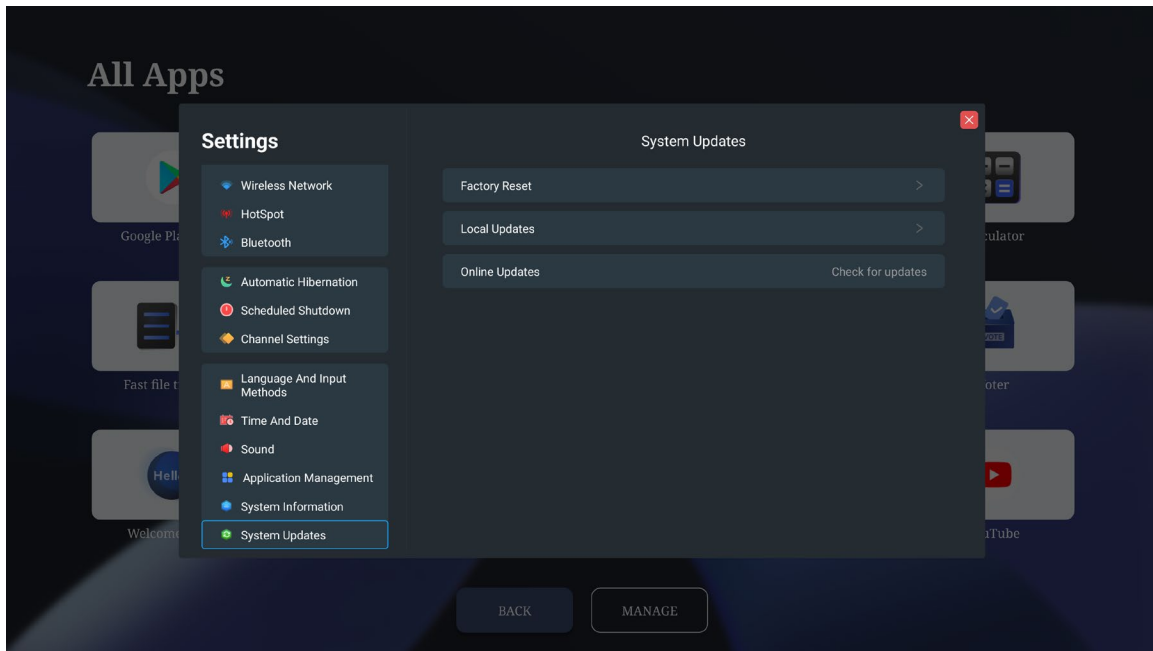

8. Polling Tool

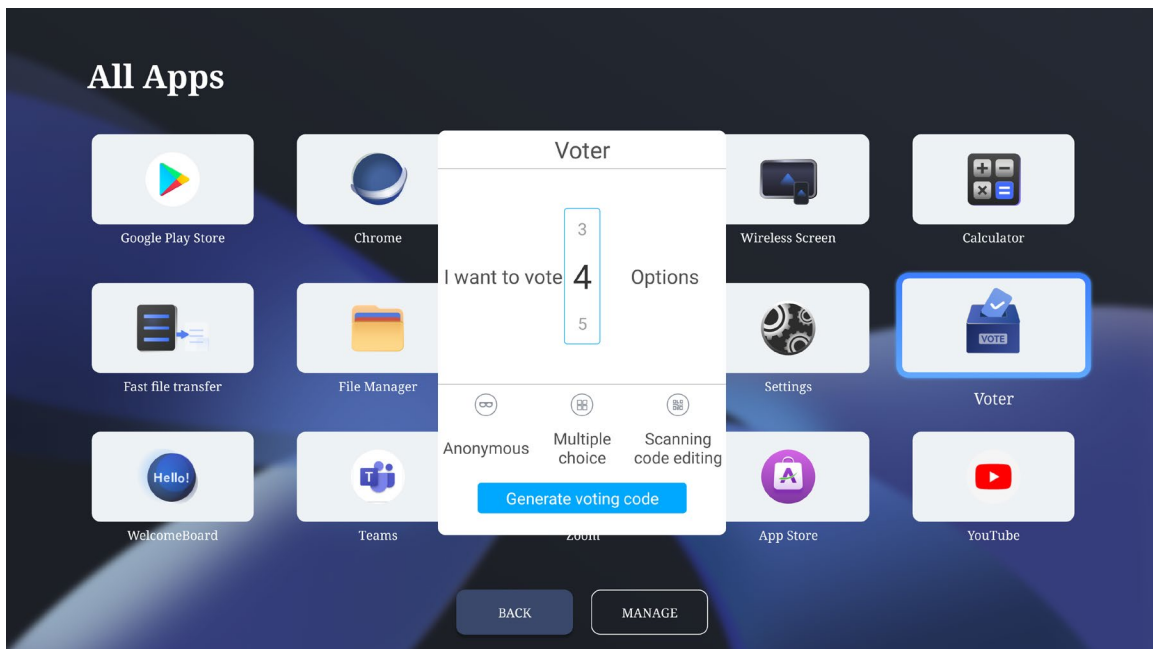


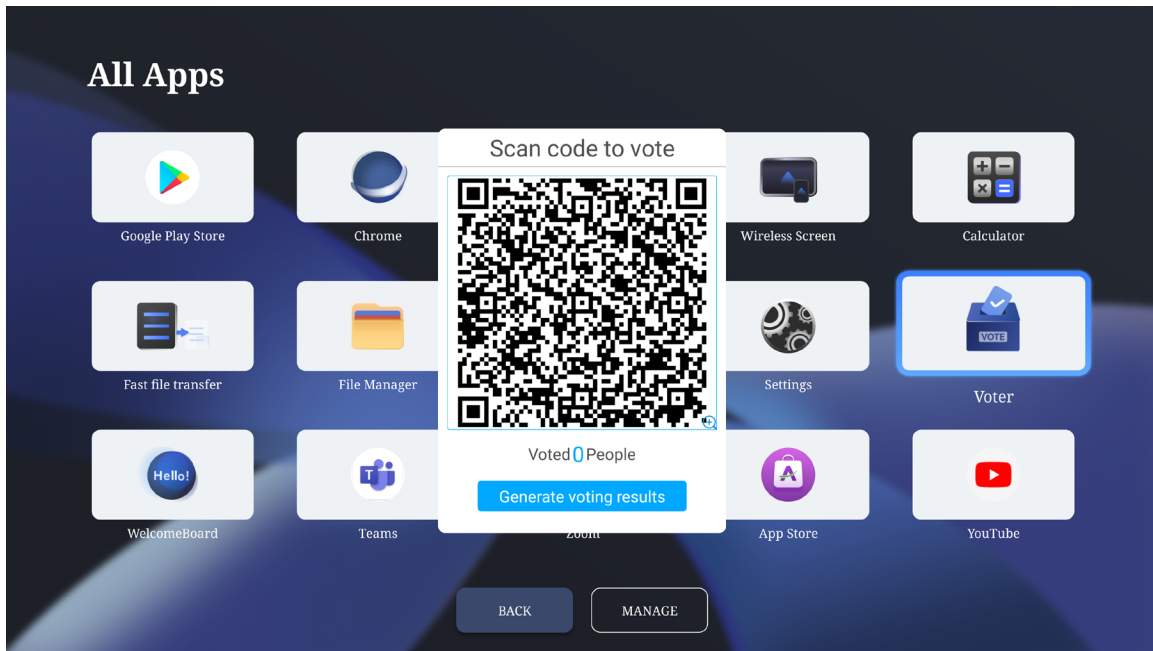

The Polling Tool requires network support. This function is unavailable when there is no network connection.

- (1) Tap to enter the application.
- (2) The screen displays the number of polling options, Anonymous, Multiple Choice, Scan to Edit, and Generate Polling Code.
- (3) Tap Anonymous: voters do not need to enter their names when voting.
- (4) Tap Multiple Choice: voters can select multiple options when voting.
- (5) Tap Scan to Edit: scan the code with a mobile phone to enter the Polling Tool editing interface. In the editing interface, you can edit the topic, options, number of options, multiple-choice setting, and anonymous setting.
- (6) Tap Generate Polling Code to generate a QR code. Use a mobile phone to enter the voting interface.

9. Welcome

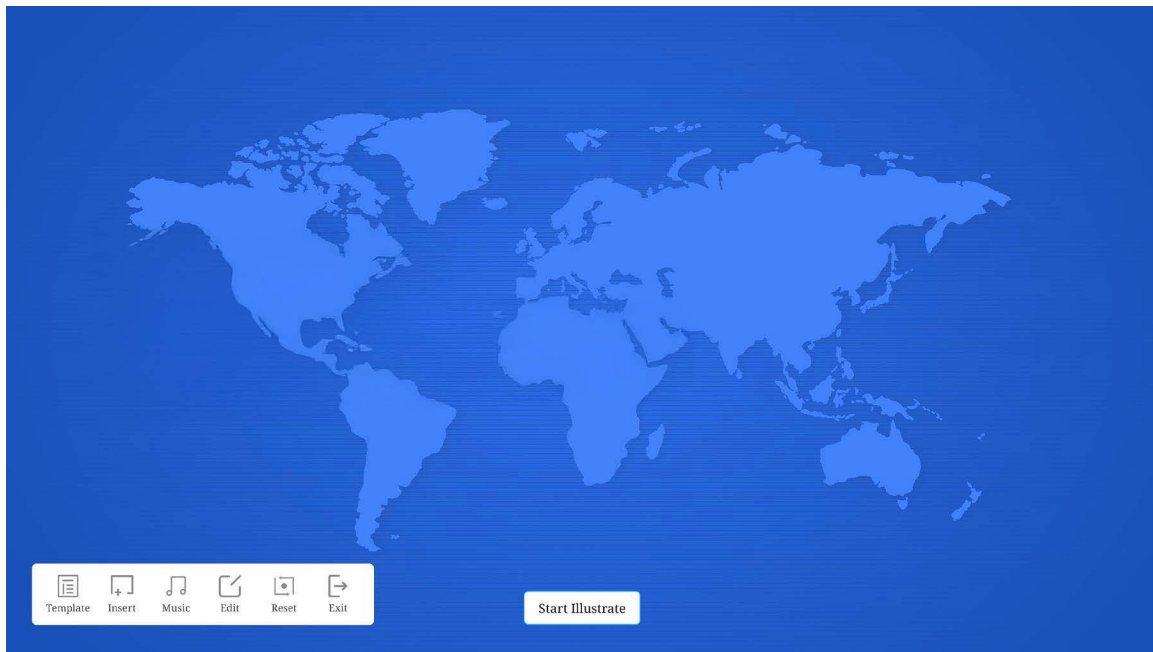

(1) The Welcome app includes multiple built-in templates. Tap a template to open it. Users can modify it and save it as a new template.

(2) After entering the template page, users can modify the background, text, music, and other elements. After setup is complete, tap Play to display it.