



IEPA-1330-RKC3-WGL0

13.3" BUS E-Paper Display Solution

The IEPA-1330 is a 13.3 inch E-Paper display. Ruggedized IK10 and IP65 rated outdoor e-paper displays are supplied in an aluminum enclosure with toughened front glass, optimized for pole mount or to any other fixed surface. With wireless and battery as standard, all models come with optional illumination, NFC and interactive functions.

Key Features

- 13.3" E-Paper Display.
- High Resolution 1600 x 1200
- Monochrome 16 gray
- Ultra-low power consumption
- Ruggedized IK10
- IP65 rated outdoor
(with toughened front glass)



Specifications

Model Name	IEPA-1330-RKC3-WGL0
Description	13.3", Greyscale, 1600x1200, Front illumination, IK10, IP65, -15 °C ~ 65 °C
Display	
Display resolution	1600 x 1200 pixels
Active Area	270.4 x 202.8 mm
Display color	Greyscale (16 Level)
Refresh Time	450 ms
Front illumination	Embedded LED(Adjustable)
Other Support	
Wi-Fi	Optional
NFC	Optional
Mechanical & Environment	
Operation Temperature	-15 °C ~ 65 °C
Dimension(mm)	242*450x56 mm 242*450x60 mm (with wall mount bracket)
Weight	4.5 kg / unit 0.80 kg / Wall mount bracket (SUS 304)
Mounting type	Round Post / Square Post / Wall
Power	
Battery	Optional
Mains power	Optional
System I/O	
M12	USB x 1; Power x 1
Certifications	
Impact Protection Rating	min IK10
Ingress Protection Rating	min IP65
Electromagnetic Compatibility	CE/FCC






Specifications are subject to change without notice.

All brands or product names are trademarks or registered trademarks of their respective companies.



Mechanical Drawing

UNIT : mm

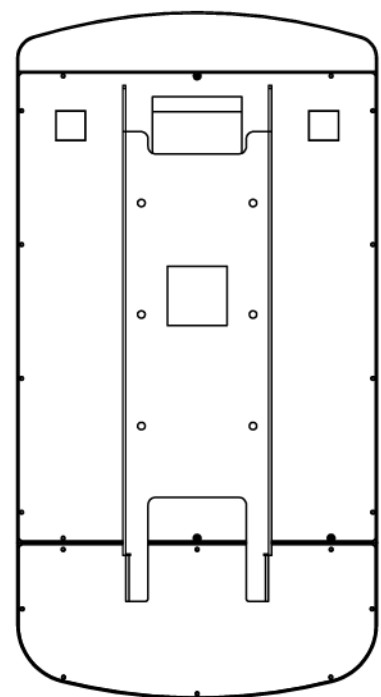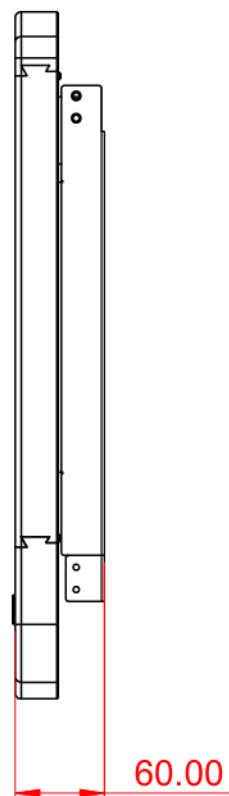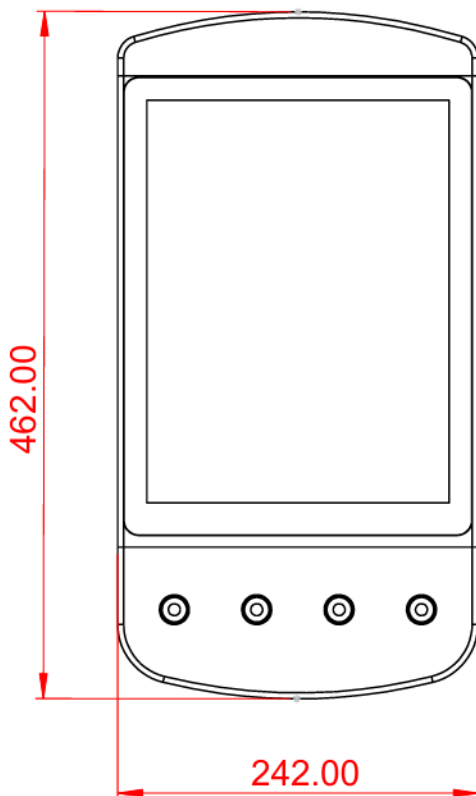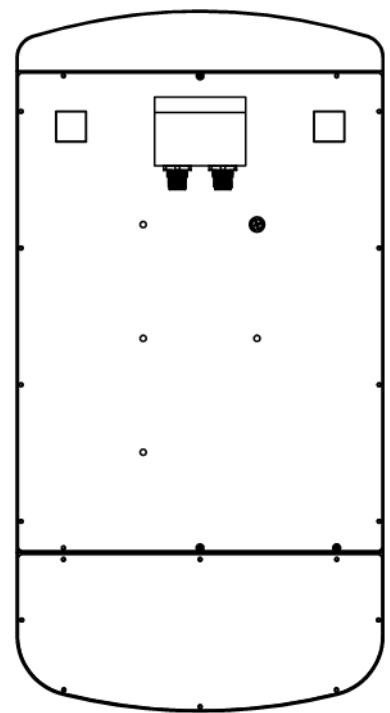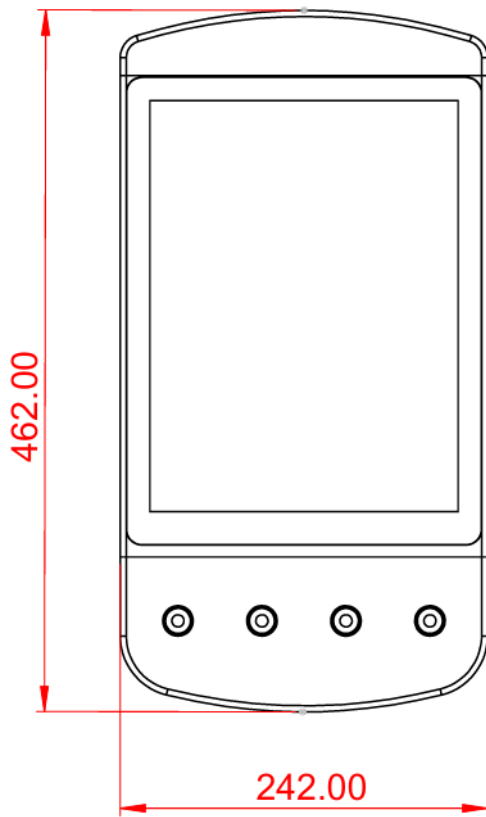



Ordering Information

Part Number	Description
IEPA-1330-RKC3-WGLO	13.3", Greyscale, 1600x1200, Front illumination, IK10, IP65, -15 °C ~ 65 °C
IEPA-1330-RKC3-WGLD	Double 13.3", Greyscale, 3200x1200, Front illumination, IK10, IP65, -15 °C ~ 65 °C

Optional Accessories

Part Number	Description