#### PW10012VA01

### 100W DC/DC Power Converter Module, 9~36V Input, 12V Output

PW10012VA01 is an intelligent, vehicle power supply. Designed to provide 100W power and control the ON/OFF switch of device on ignition status. PW10012VA01 is a wide input 9 to 36V vehicle power supply capable of surviving tough engines. The timing of power on ignition delay is programmable for minutes or seconds.

### **Key Features**

- 9 ~ 36V Wide Input Voltage.
- Single 12V DC Voltage Output.
- 100W Max Load
- High Efficiency up to 95%
- Short Circuit Protection
- Over Current/Voltage protection
- Ignition Shutdown Control
- Compact Size
- ROHS Compliant



Specifications V1		
Model No.	PW10012VA01	
Description	100W DC/DC power Converter Module	
Input Voltage	DC 9V ~ 36V	
Output Voltage	DC 12V	
Max. Output Power	100W	
Efficiency	Up to 95%	
Noise and Ripple	< 150mV	
Line Regulation	< 0.2% @12V	
Load Regulation	<0.25% @ 12V	
Ignition Control	Yes	
Power On/Off Delay	Timing Programmable or Jumper setting	
Operation Temperature	-20 °C~ 60 °C	
Storage Temperature	-30 °C~ 70 °C	
Dimension (LxWxH)	102x50x30 mm	


Specifications are subject to change without notice.


All brands or product names are trademarks or registered trademarks of their respective companies.

1 2016/8/16

# **Mechanical Drawing**

Outline Dimensions Unit:mm

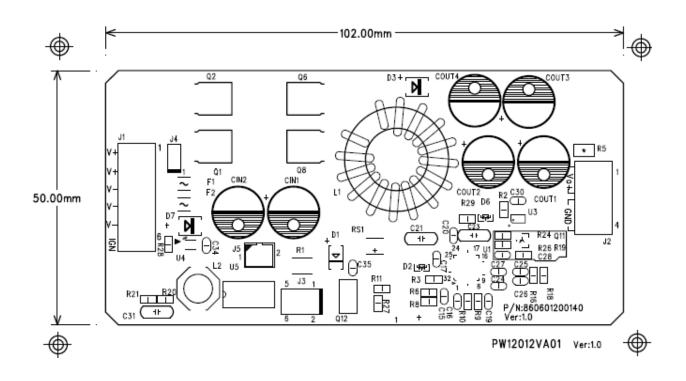

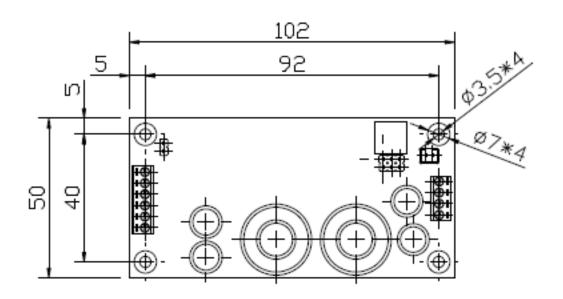

2 2016/8/16

# Power Connector Pin Assignment:

# J1: Power Input Connector

Pin 1	Pin 2	Pin 3	Pin 4	Pin 5
V-in	V-in	GND	GND	IGN
(Voltage Input)	(Voltage Input)			(Ignition Input)

# J2: Power Output Connector

Pin 1	Pin 2	Pin 3	Pin 4
V-out	V-out	GND	GND
(Voltage Out)	(Voltage Out)		

J3:Ignition Timing Setting Connector

J5: Ignition Disable Connector

Ordering Information			
Part Number	Description		
880611203010	PCBA,PWR,PW10012VA01.VER1,P		

3 2016/8/16