


# Platform Specifications



Platform

## Key Features

- Sunlight Readable
- Wide Viewing Angle
- High Contrast Ratio
- LVDS
- Long Lamp Life
- Fast Response Time
- Thin and Light



## SLO1223 (AUO G121SN01)

<b>Model No.</b>	SLO1223
<b>LCD Display</b>	12.1" TFT LCD Module
<b>Display Area</b>	245.76 x 184.32mm
<b>Brightness</b>	400 cd/m <sup>2</sup>
<b>Resolution</b>	800x600 (SVGA)
<b>Contrast Ratio</b>	500 : 1
<b>Pixel Pitch (mm)</b>	0.3075(H) x 0.3075(V)
<b>Viewing Angle</b>	+60°~-60°(H), +60°~-40°(V)
<b>Display Colors</b>	262k colors
<b>Response Time</b>	35ms
<b>Sync</b>	LVDS
<b>Power Consumption</b>	18W
<b>Inverter</b>	LI 0212A
<b>Control Board (Optional)</b>	AD5621GA (Standard)
<b>F / R Control Button</b>	Power Switch, Menu, Select (+,-), Auto
<b>OSD Menu</b>	Brightness, Contrast, H/V Position, Color, Phase, Clock....
<b>Dimensions (WxHxD)</b>	324x254x50mm
<b>Weight</b>	2.3kgs
<b>Optional</b>	<input checked="" type="checkbox"/> AOT <input checked="" type="checkbox"/> Touch Screen

Specifications are subject to change without notice. All brands or product names are trademarks or registered trademarks of their respective companies.

<b>Control Board (Optional)</b>	AD5621GA/AD5621GD/AD5766GDVA
<input checked="" type="checkbox"/> <b>AD5621GA</b>	VGA+Audio
<input checked="" type="checkbox"/> <b>AD5621GD</b>	VGA+DVI
<input checked="" type="checkbox"/> <b>AD5766GDVA</b>	VGA+CVBS+S-Video+Audio (Optional DVI / Component)
<b>F / R Control Button</b>	5 Key / 4 Key (Optional)
<input checked="" type="checkbox"/> <b>5 Key</b>	Power Switch, Menu, Select (+,-), Auto
<input checked="" type="checkbox"/> <b>4 Key</b>	Power Switch, Menu, Select (+,-)

SLO= Open Frame  
SLD= Industrial Casing




# Platform Specifications



Platform

## Outline Dimensions unit:mm

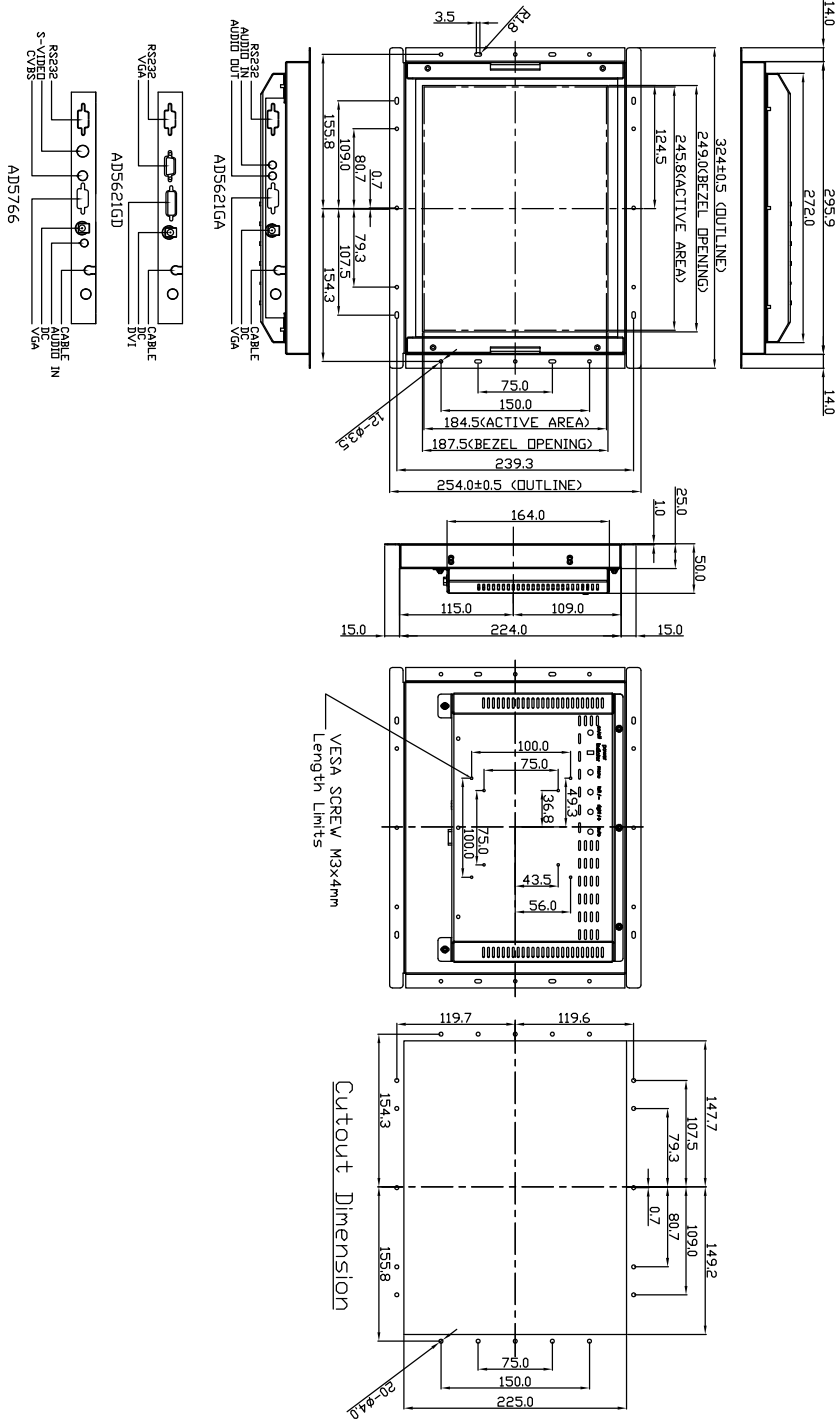

Note:1.3 different AD boards can be selectable.  
2.Temper glass and touch screen can be installed.